



# START eco Downlight 215 2400lm 830 Surface

Code article 0055195

**SYLVANIA**



**START**<sup>TM</sup>

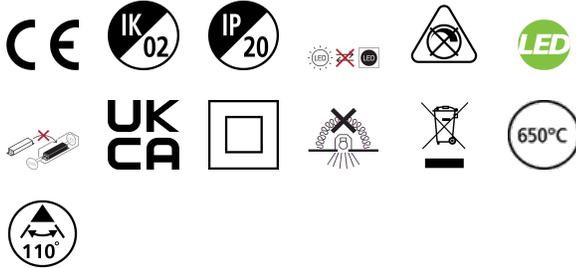

START eco Downlight is an integrated LED surface mounted downlight with built-in non dimmable driver; 24W; 2400Lm; 100Lm/W; 3000K.

## Atouts techniques


### Dimensions (mm)

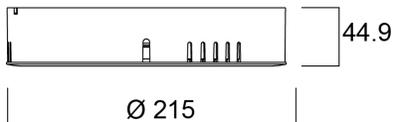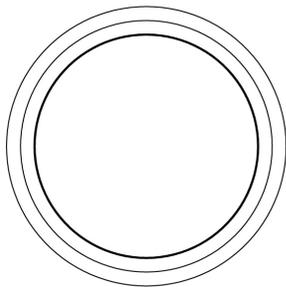

### Photométrie

Distance [m]	Cone diameter [m]	E171	E172	E173	E174
0.5	1.56	329	329	207	
1.0	3.12	81	81	51	
1.5	4.67	36	36	20	
2.0	6.23	20	20	11	
2.5	7.79	10	10	6	
3.0	9.35	6	6	4	
		Illuminance [lx]			

Distance [m]    Cone diameter [m]    Illuminance [lx]  
 — C0 - C180 (Half beam angle: 114.6°)

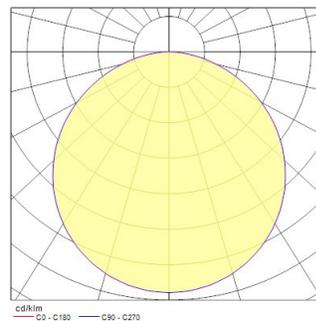

# START eco Downlight 215 2400lm 830 Surface

Code article 0055195

**SYLVANIA**

## Données générales

Nom du produit	START eco Downlight 215 2400lm 830 Surface
Technologie	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Montage	Ceiling surface mounting
Built in presence detector	NONE
General application	Hospitality, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Warranty	3 ans

## Données optiques

Fixture luminous flux (lm)	2400
Luminaire efficacy (lm/W)	100
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Distribution type	Symmetric
Glare control	< 28
Photobiological Risk Group	RG0

## Caractéristiques électriques

Consommation électrique totale (W)	24
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.5
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	115.0
Electrical protection	Class II
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	173
Courant d'appel (A)	14
Inrush Duration (µs)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Medium (21% - 40%)
Max. products per 10A C Breaker	40
Max. products per 13A C Breaker	53
Max. products per 16A C Breaker	66
Max. products per 20A C Breaker	83
Max. products per 10A B Breaker	23
Max. products per 13A B Breaker	31
Max. products per 16A B Breaker	39
Max. products per 20A B Breaker	49
Connectable conductor cross section - Min (mm <sup>2</sup> )	0.75
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5

## Durée de vie

Lifespan L70 B50

30000

# START eco Downlight 215 2400lm 830 Surface

Code article 0055195

**SYLVANIA**

## Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK02
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Finition réflecteur	Not Applicable
Nominal Product Height (mm)	34
Nominal Product Diameter (mm)	215
Poids (kg)	0.42

## Emballage

Product EAN number	5410288551951
Longueur simple de l'emballage (cm)	21.8
Largeur simple de l'emballage (cm)	4.8
Packaging single depth (cm)	22.0
DUN14 (inner)	15410288551958
Units per outer package	8
Packaging outer length / height (cm)	45.0
Packaging outer width (cm)	23.0
Packaging outer depth (cm)	21.5

## Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-40