


START Waterproof Tubular 1200 IP66 4200lm 840 PC

Code article 0047155

SYLVANIA


STARTTM

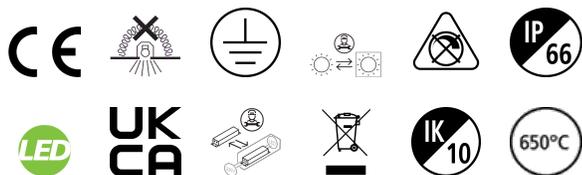


START Waterproof Tubular is an aesthetically attractive integrated LED fixture. Easy to install with 304 stainless steel fixing brackets for ceiling mounting. UV resistant Polycarbonate housing; 4000K; 35W; 4200lm; 120lm/W and lumen maintenance L870:B50 of 68,000 hours lifetime. IP66; IK10; Class I; 1190mm x 62mm. Can be suspended with additional accessory (SKU 0046035)

Atouts techniques

Dimensions (mm)

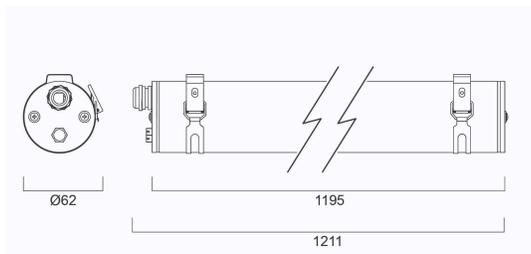

Photométrie



START Waterproof Tubular 1200 IP66 4200lm 840 PC

Code article 0047155

SYLVANIA

Données générales

Nom du produit	START Waterproof Tubular 1200 IP66 4200lm 840 PC
Technologie	LED
Cap/Base	N/A
Housing	PC Polycarbonate, Polyester
Built in presence detector	NONE
General application	Logistics & Industry
Operating temperature range (°C)	-25°C...+50°C
Virtual assistant compatibility	N/A
ETIM Class	EC000109
Numéro virtuel FI	4357126
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	4200
Luminaire efficacy (lm/W)	120
Température de couleur (K)	4000
Couleur de lumière	Cool White
IRC (Ra)	80
Beam Angle (°)	120
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	35
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	350
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	19
Max. products per 13A C Breaker	26
Max. products per 16A C Breaker	31
Max. products per 20A C Breaker	39
Max. products per 10A B Breaker	11
Max. products per 13A B Breaker	15
Max. products per 16A B Breaker	19
Max. products per 20A B Breaker	23
Connectable conductor cross section - Max (mm ²)	1.5

Durée de vie

Lifespan L70 B50	68000
Lifespan L80 B50	50000
Lifespan L80 B20	42800

START Waterproof Tubular 1200 IP66 4200lm 840 PC

Code article 0047155

SYLVANIA

Données physiques

Housing colour	White
IP rating	IP66
IK rating	IK10
Longueur (mm)	1190
Nominal Product Diameter (mm)	62
Poids (kg)	1.24

Emballage

Product EAN number	5410288471556
Longueur simple de l'emballage (cm)	127.0
Largeur simple de l'emballage (cm)	7.4
Packaging single depth (cm)	7.4
DUN14 (inner)	15410288471553
Units per outer package	6
Packaging outer length / height (cm)	128.5
Packaging outer width (cm)	24.2
Packaging outer depth (cm)	17.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-25-50