

PIXO LINE 1500 UGR19 830 NERO

Codice n. 0007827

SYLVANIA


PROTM



Pixo Line is a linear track system, adds flexibility to any space due the variety of product options Offers an easy installation with two separate modules Push-in/push-out mechanism with GR6d-15 connector Compatible with Zhaga Book 14 Aluminium body, plastic end caps,aluminised plastic low glare optics in a single line configuration, light beam angle:70° Textured black finishing colour. Light color temperature: 3000K, warm white, max. system power: 50W Max. fixture lumen output: 7300lm, efficacy: 146lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation Multipower driver module with 8 power settings meet all installation needs with one single product, selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class III. Degree of protection: IP20, suitable for indoor environment only Light modules should be combined with suitable in-track drivers Nominal product dimensions: L.1464mmx37.4mmx37mm

Dati tecnici

Dimensioni (mm)

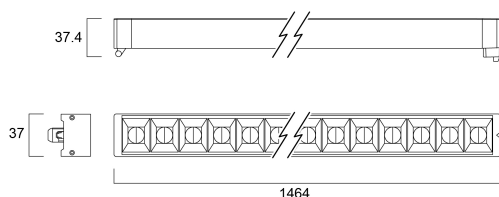

Fotometrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam diameter [in]	Beam diameter [ft]
0.5	0.66	70°	0.66	2.52	0.86
1.0	1.33	70°	1.33	5.04	1.71
1.5	1.99	70°	1.99	7.56	2.51
2.0	2.66	70°	2.66	10.08	3.31
2.5	3.32	70°	3.32	12.60	4.13
3.0	3.99	70°	3.99	15.12	4.94
3.5	4.65	70°	4.65	17.64	5.75
4.0	5.32	70°	5.32	20.16	6.56
4.5	5.98	70°	5.98	22.68	7.37
5.0	6.65	70°	6.65	25.20	8.18
5.5	7.31	70°	7.31	27.72	8.99
6.0	7.98	70°	7.98	30.24	9.80
6.5	8.64	70°	8.64	32.76	10.61
7.0	9.31	70°	9.31	35.28	11.42
7.5	9.97	70°	9.97	37.80	12.23
8.0	10.64	70°	10.64	40.32	13.04
8.5	11.30	70°	11.30	42.84	13.85
9.0	11.97	70°	11.97	45.36	14.66
9.5	12.63	70°	12.63	47.88	15.47
10.0	13.30	70°	13.30	50.40	16.28
10.5	13.96	70°	13.96	52.92	17.09
11.0	14.63	70°	14.63	55.44	17.90
11.5	15.29	70°	15.29	57.96	18.71
12.0	15.96	70°	15.96	60.48	19.52
12.5	16.62	70°	16.62	63.00	20.33
13.0	17.29	70°	17.29	65.52	21.14
13.5	17.95	70°	17.95	68.04	21.95
14.0	18.62	70°	18.62	70.56	22.76
14.5	19.28	70°	19.28	73.08	23.57
15.0	19.95	70°	19.95	75.60	24.38
15.5	20.61	70°	20.61	78.12	25.19
16.0	21.28	70°	21.28	80.64	25.99
16.5	21.94	70°	21.94	83.16	26.80
17.0	22.61	70°	22.61	85.68	27.61
17.5	23.27	70°	23.27	88.20	28.42
18.0	23.94	70°	23.94	90.72	29.23
18.5	24.60	70°	24.60	93.24	30.04
19.0	25.27	70°	25.27	95.76	30.85
19.5	25.93	70°	25.93	98.28	31.66
20.0	26.60	70°	26.60	100.80	32.47
20.5	27.26	70°	27.26	103.32	33.28
21.0	27.93	70°	27.93	105.84	34.09
21.5	28.59	70°	28.59	108.36	34.89
22.0	29.26	70°	29.26	110.88	35.70
22.5	29.92	70°	29.92	113.40	36.51
23.0	30.59	70°	30.59	115.92	37.32
23.5	31.25	70°	31.25	118.44	38.13
24.0	31.92	70°	31.92	120.96	38.94
24.5	32.58	70°	32.58	123.48	39.75
25.0	33.25	70°	33.25	126.00	40.56
25.5	33.91	70°	33.91	128.52	41.37
26.0	34.58	70°	34.58	131.04	42.18
26.5	35.24	70°	35.24	133.56	42.99
27.0	35.91	70°	35.91	136.08	43.80
27.5	36.57	70°	36.57	138.60	44.61
28.0	37.24	70°	37.24	141.12	45.42
28.5	37.90	70°	37.90	143.64	46.23
29.0	38.57	70°	38.57	146.16	47.04
29.5	39.23	70°	39.23	148.68	47.85
30.0	39.90	70°	39.90	151.20	48.66
30.5	40.56	70°	40.56	153.72	49.47
31.0	41.23	70°	41.23	156.24	50.28
31.5	41.89	70°	41.89	158.76	51.09
32.0	42.56	70°	42.56	161.28	51.90
32.5	43.22	70°	43.22	163.80	52.71
33.0	43.89	70°	43.89	166.32	53.52
33.5	44.55	70°	44.55	168.84	54.33
34.0	45.22	70°	45.22	171.36	55.14
34.5	45.88	70°	45.88	173.88	55.95
35.0	46.55	70°	46.55	176.40	56.76
35.5	47.21	70°	47.21	178.92	57.57
36.0	47.88	70°	47.88	181.44	58.38
36.5	48.54	70°	48.54	183.96	59.19
37.0	49.21	70°	49.21	186.48	60.00
37.5	49.87	70°	49.87	189.00	60.81
38.0	50.54	70°	50.54	191.52	61.62
38.5	51.20	70°	51.20	194.04	62.43
39.0	51.87	70°	51.87	196.56	63.24
39.5	52.53	70°	52.53	199.08	64.05
40.0	53.20	70°	53.20	201.60	64.86
40.5	53.86	70°	53.86	204.12	65.67
41.0	54.53	70°	54.53	206.64	66.48
41.5	55.19	70°	55.19	209.16	67.29
42.0	55.86	70°	55.86	211.68	68.10
42.5	56.52	70°	56.52	214.20	68.91
43.0	57.19	70°	57.19	216.72	69.72
43.5	57.85	70°	57.85	219.24	70.53
44.0	58.52	70°	58.52	221.76	71.34
44.5	59.18	70°	59.18	224.28	72.15
45.0	59.85	70°	59.85	226.80	72.96
45.5	60.51	70°	60.51	229.32	73.77
46.0	61.18	70°	61.18	231.84	74.58
46.5	61.84	70°	61.84	234.36	75.39
47.0	62.51	70°	62.51	236.88	76.20
47.5	63.17	70°	63.17	239.40	77.01
48.0	63.84	70°	63.84	241.92	77.82

PIXO LINE 1500 UGR19 830 NERO

Codice n. 0007827

SYLVANIA

Dati dimensionali

Colore del prodotto	Nero
Classificazione IP	IP20
Classificazione IK	IK03
Lunghezza nominale del prodotto (mm)	1464
Larghezza nominale prodotto (mm)	37
Altezza nominale prodotto (mm)	37.4
Peso (Kg)	0.9

Dati di imballo

Codice EAN prodotto	5410288078274
Lunghezza/altezza imballo singolo (cm)	147.0
Larghezza imballo singolo (cm)	4.3
Profondità imballo interno (cm) (singolo)	4.3
DUN14_2	15410288078271
Quantità per imballo esterno	10
Lunghezza/ Altezza imballo esterno (cm)	149.0
Packaging outer width (cm)	24.0
Profondità imballo esterno (cm)	11.0

Dati di sicurezza

Test del filo incandescente (°)	650
Temperatura ottimale di utilizzo (°C)	-20-40