

ToLEDo RT G9 V2 CL 470LM DIM 865 SL

Code article 0030789


SYLVANIA



LED retrofit replacement for halogen G9 mains voltage capsules ToLEDo Retro G9 has the same look and feel as halogen design thanks to glass construction body and wide light distribution Compact design Omni-directional light distribution High lumen efficacy: up to 131lm/W Up to 91% energy saving Dimmable and non-dimmable versions Suitable for chandeliers, interior display, shop windows, decorative and general lighting applications

Atouts techniques

Dimensions (mm)

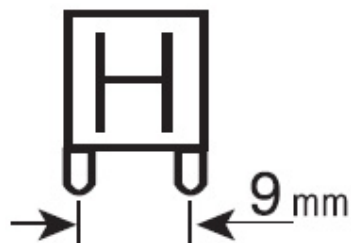

Photométrie

ToLEDo RT G9 V2 CL 470LM DIM 865 SL

Code article 0030789

SYLVANIA

Données générales

Nom du produit	ToLEDo RT G9 V2 CL 470LM DIM 865 SL
Technologie	LED
Lamp shape	Capsule
Cap/Base	G9
Lamp finish	Clear
Built in presence detector	NONE
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Virtual assistant compatibility	N/A
ETIM Class	EC001959
Numéro virtuel FI	4741211
Warranty	3 ans

Données optiques

Useful luminous flux (Φuse)	470
Température de couleur (K)	6500
Couleur de lumière	Daylight
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	285
Photobiological Risk Group	RG1

Caractéristiques électriques

Power consumption (W)	4.4
Wattage (W)	4.4
Equivalent watt (W)	40
Actuel (A)	0.032
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Control gear required	No
Type d'appareillage	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Courant d'appel (A)	3.24
Inrush Duration (µs)	7100
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50Hz

Durée de vie

Lifespan L70 B50	15000
------------------	-------

Données physiques

Housing colour	Transparent
IP rating	IP20
Nominal Product Height (mm)	55.5
Nominal Product Diameter (mm)	18
Poids (kg)	0.011

ToLEDo RT G9 V2 CL 470LM DIM 865 SL

Code article 0030789

SYLVANIA

Emballage

Product EAN number	5410288307893
Longueur simple de l'emballage (cm)	6.1
Largeur simple de l'emballage (cm)	5.1
Packaging single depth (cm)	8.2
DUN14 (inner)	15410288307890
Units per outer package	6
Packaging outer length / height (cm)	19.5
Packaging outer width (cm)	11.0
Packaging outer depth (cm)	9.5

Sécurité

Condition de fonctionnement optimal (° C)	-20-40
Consignes de nettoyage en cas de bris	Not applicable
Lampe à objectif spécial	No
Utilisation pour applications sèches uniquement	Yes
Ne convient pas à l'éclairage résidentiel	Yes
Safety message	Not Suitable for totally enclosed fixtures