

# Resisto 1500 IP65 4200lm 840 SSA

Code article 0010266

**SYLVANIA**


**PRO**<sup>TM</sup>



Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 4200lm; 30W; 140lm/W; 4000K; SDCM<5; CRI80; IP66; IK08 (sensor IK03); Class I; 69,000hrs (L80B20) lifespan; 1588mm x 87mm x 80mm; D-mark; SylSmart Connected Building enabled.

## Atouts techniques


### Dimensions (mm)

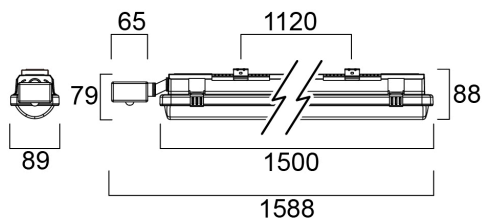

### Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Illuminance [lx]
0.5	1.43 1.32	50° 52°	543 511	857 807
1.0	2.86 2.63	50° 52°	1081 1022	428 397
1.5	4.29 3.95	50° 52°	1621 1533	285 265
2.0	5.71 5.27	50° 52°	2161 2037	214 199
2.5	7.14 6.59	50° 52°	2701 2541	171 159
3.0	8.57 7.90	50° 52°	3241 3021	140 131

Distance [m]      Cone diameter [m]      Illuminance [lx]  
 — C0 - C180 (Half beam angle: 105.0°)  
 — C90 - C270 (Half beam angle: 110.0°)



# Resisto 1500 IP65 4200lm 840 SSA

Code article 0010266

**SYLVANIA**

## Données générales

Nom du produit	Resisto 1500 IP65 4200lm 840 SSA
Technologie	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Montage	Ceiling surface mounting, Suspended, Wall surface mounted
Built in presence detector	PIR
General application	Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	4200
Luminaire efficacy (lm/W)	140
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Colour Consistency (SDCM)	5
Beam Angle (°)	110
Distribution type	Diffuse
Glare control	< 23
Photobiological Risk Group	RG1

## Caractéristiques électriques

Consommation électrique totale (W)	30
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	9
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	Yes
Dimming method	SylSmart Connected (SSA)
Minimum dimming level (%)	1
Drive current (mA)	350
Courant d'appel (A)	29
Inrush Duration (µs)	180
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	36
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	27
Connectable conductor cross section - Max (mm <sup>2</sup> )	2.5

# Resisto 1500 IP65 4200lm 840 SSA

Code article 0010266

**SYLVANIA**

## Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	69000
Lifespan L90 B10	31000

## Données physiques

Housing colour	Grey
IP rating	IP65
IK rating	IK08
IK rating of sensor	IK03
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Longueur (mm)	1588
Largeur (mm)	87
Nominal Product Height (mm)	80

## Emballage

Product EAN number	5410288102665
Longueur simple de l'emballage (cm)	150.5
Largeur simple de l'emballage (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (inner)	05410288102665
Units per outer package	1
Packaging outer length / height (cm)	150.5
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	8.5

## Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-20-40