
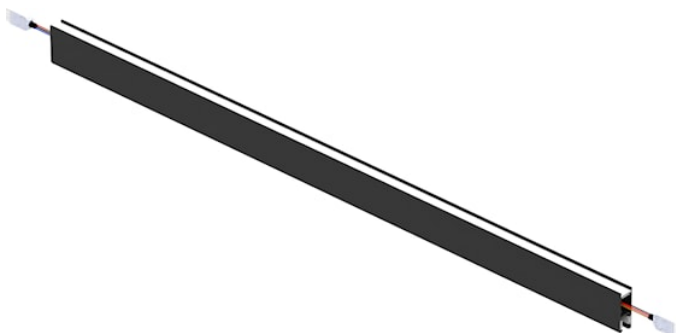


OT H-Trk Ready Joiner 940 DALI Blk H32C1405/b6-o-2

Artikelnummer 9200425


Concord

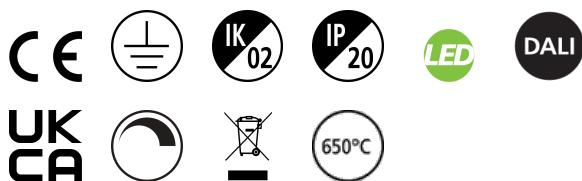

H-Track Ready Kit is a flexible linear track light system easy and fast to install, suitable for retail, museum, galleries, hospitality, and office environments H- Track Ready Joiner module - Complete with H-Track extruded aluminum body, LED light source, DALI control unit, quick connectors, opal diffuser and supply cable. H-Track Ready Joiner kit supplied with two prewired quick connectors. Opal diffuser, diffuse light beam angle:112°. Textured black finishing colour. Light color temperature: 4000K, natural white, Total system power: 34.5W. Fixture lumen output: 2600lm, efficacy: 75lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3),low flicker, DALI dimmable driver. Track part made of extruded aluminum body and copper conductors -L1/L2/L3/Neutral/ground 16A/440V + D+/D- 2x1A/50V FELV AC (DALI). Suitable for direct or indirect installation. Compatible with OneTrack, and Lytespan H-Track accessories (installation accessories are excluded). Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only. Nominal product dimensions: L.1405mmx31.4mmx83mm


Technische Werte

Größe (mm)

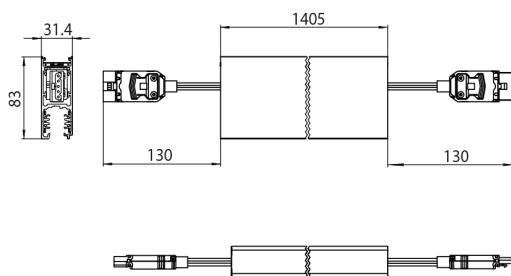

Photometrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam diameter [m]	Beam diameter [m]
3.0	8.93	8.76	104	104	104
2.5	7.44	7.30	149	149	149
2.0	5.95	5.84	233	233	233
1.5	4.46	4.33	415	415	415
1.0	2.98	2.92	983	983	983
0.5	1.49	1.46	3732	3732	3732
Distance [m]			Illuminance [lx]		
C0 - C180 (Half beam angle: 112.2°)			C0 - C180 (Half beam angle: 112.2°)		
C90 - C270 (Half beam angle: 112.2°)			C90 - C270 (Half beam angle: 112.2°)		



OT H-Trk Ready Joiner 940 DALI Blk H32C1405/b6-o-2

Artikelnummer 9200425

Concord

Allgemeine Daten

Produktname	OT H-Trk Ready Joiner 940 DALI Blk H32C1405/b6-o-2
Technologie	LED
Sockel	N/A
Montage	Suspended
Built in presence detector	NONE
Umgebungstemperaturbereich	1°C...+25°C
ETIM Klasse	EC002892
Garantie	5 Jahre

Optische Daten

Leuchtenlichtstrom (lm)	2600
Systemeffizienz (lm/W)	75
Leuchtenbetriebswirkungsgrad (%)	100
Farbcode	940
Lichtfarbe	Neutral White
Farbwiedergabeindex (Ra)	90
Farbkonsistenz (SDCM)	SDCM3
Ausstrahlungswinkel (°)	112
Distributionstyp	Diffuse
Photobiological Risk Group	RG0

Elektrische Daten

Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Leistungsfaktor der Lampe	0.95
Elektrische Schutzklasse	Class I
Vorschaltgerät benötigt	No
Betriebsgerätetyp	LED driver constant current
Dimmbar	Yes
Dimming method	DALI-2
Einschaltstrom (A)	10
Dauer Einschaltstrom (µs)	200
Energy Efficiency Class (A->G) of contained light source	F
Max. Anzahl Leuchten pro 10A C Sicherung	31
Max. Anzahl Leuchten pro 16A C Sicherung	51
Max. Anzahl Leuchten pro 16A B Sicherung	30
Connectable conductor cross section - Min (mm²)	7.5
Connectable conductor cross section - Max (mm²)	7.5

Physikalische Daten

Gehäusefarbe	RAL 9005 - Jet black
IP Schutzart	IP20
IK Schutzart	IK02
Länge (mm)	1405
Breite (mm)	31.4
Nominale Produkthöhe (mm)	83
Gewicht (kg)	4.0

OT H-Trk Ready Joiner 940 DALI Blk H32C1405/b6-o-2

Artikelnummer 9200425

Concord

Packaging

Verpackungsbezeichnung	Carton
EAN Code	4012289004255
Einzelverpackung Länge (cm)	10.0
Einzelverpackung Breite (cm)	10.0
Einzelverpackung Tiefe (cm)	150.0
Anzahl an Einheiten je Außenverpackung	1
Außenverpackung Länge (cm)	10.0
Außenverpackung Breite (cm)	10.0
Außenverpackung Tiefe (cm)	150.0

Safety data

Glühdrahttest (°C)	650
Optimale Betriebstemperatur (°C)	1-25