




IS 3360

DALI-2 APC - in-ceiling installation, sq.
 EAN 4007841 080624
 Article number 080624



Function description

Higher, further, faster. Infrared presence detector IS 3360 for indoors and out, ideal for watching over high spaces and large areas, such as multi-storey and underground car parks, installation height up to 4 m, 360° angle of coverage, reach 20 m max. (tangential). Available either in round or square surface-mounted and concealed version.

Technical specifications

Dimensions (L x W x H)	121 x 94 x 94 mm
With motion detector	Yes
Manufacturer's Warranty	5 years
Settings via	Remote control, Potentiometers, Smart Remote
With remote control	No
Version	DALI-2 APC - in-ceiling installation, sq.
PU1, EAN	4007841080624
Type	Motion and Presence Detector
Application, place	Indoors
Application, room	production facilities, recreation room, changing room, function room / ancillary room, sports hall, reception / lobby, stairwell, WC / washroom, multi-storey / underground car park, warehouse, Indoors
Colour	white

Optimum mounting height	2,8 m
Detection angle	360 °
Angle of aperture	180 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	Ø 8 m (50 m ²)
Reach, tangential	Ø 40 m (1257 m ²)
Reach, presence	Ø 3 m (7 m ²)
Switching zones	1416 switching zones
Functions	Normal / test mode, Manual ON / ON-OFF, Constant-lighting control ON-OFF
Twilight setting	2 – 1000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes

IS 3360

DALI-2 APC - in-ceiling installation, sq.
 EAN 4007841 080624
 Article number 080624



Technical specifications

Colour, RAL	9003	Basic light level function time	1-30 min, all night
Includes corner wall mount	No	Main light adjustable	50 - 100 %
Installation site	ceiling	Twilight setting TEACH	Yes
Installation	In-ceiling installation, Ceiling	Constant-lighting control	Yes
IP-rating	IP20	Interconnection	Yes
Ambient temperature	-20 – 50 °C	Type of interconnection	Master/slave
Material	Plastic	Interconnection via	Cable
Mains power supply	220 – 240 V / 50 – 60 Hz		
Control output, Dali	Broadcast 1x30 electronic ballasts		
Sensor Technology	Passive infrared		
Mounting height	2,50 – 4,00 m		
Mounting height max.	4,00 m		


Accessories

EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 559410	Service remote control RC8
EAN 4007841 592806	User remote control RC5
EAN 4007841 056728	Black cover for IR-sensors

IS 3360


DALI-2 APC - in-ceiling installation, sq.
EAN 4007841 080624
Article number 080624

Detection Zone

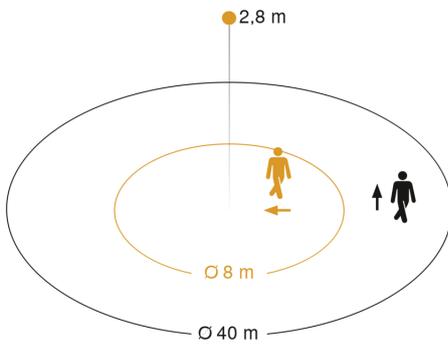


Mögliche Montagehöhe: 2,50 m – 4,00 m
Orange: radial
Schwarz: tangential


Dimension Drawing 1

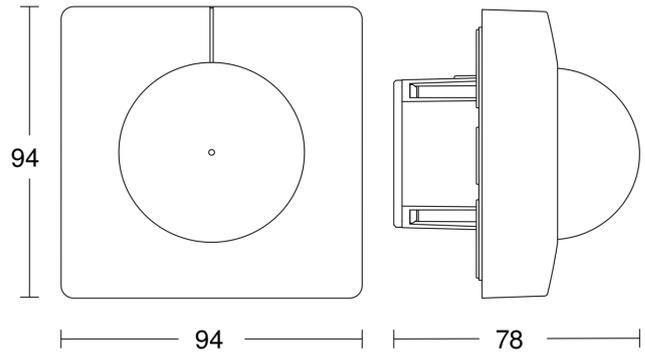

Dimension Drawing 2

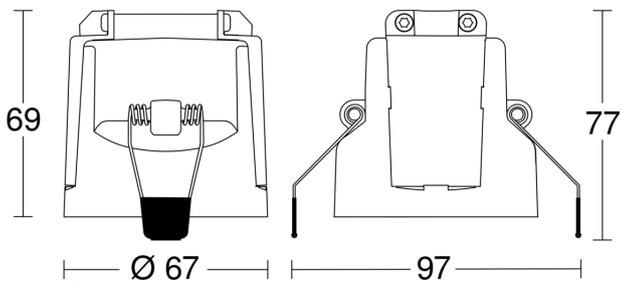

Master circuit diagram

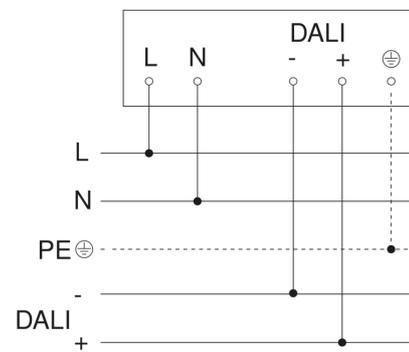

IS 3360

DALI-2 APC - in-ceiling installation, sq.
EAN 4007841 080624
Article number 080624

Circuit diagram for interconnecting DALI-2 APC with DALI-2 IPD

