

EMERGENCY PACK MANUAL TESTING 6V-55V

Code article 0046600

SYLVANIA


PROTM



The standard, non- Auto test emergency kit enables conversion of general lighting for emergency operation and is a good solution for applications where self-testing is not required or suitable. It is used for driving luminaires with forward voltages (Vf) of 6V to 55V, and built-in adaptability that allows for optimum output current based on the forward voltage of the specific light engine for a more precise match to the controlled LED scheme. Features: 3W power consumption with approx 300 lumens, Suitable for independent mounting, Auto load detecting, Compatible with leading brands of mains drivers, SmartCharge technology for NiMH batteries, Battery deep discharge protection, Compatible with NiMH batteries, 3-hour rated emergency duration, SELV output. Supply current (max) 25mA. Ambient temperature (ta): 0°C to +35°C. Max case temperature (tc) +70°C. Conductor size : 0.2 to 1.5mm². NiMH battery. Product contains a charging regime that prolongs battery life and reduces parasitic power consumption during the product life cycle. By controlling battery temperature this results in energy saving and reduction in maintenance costs throughout the premises.

Atouts techniques

Dimensions (mm)

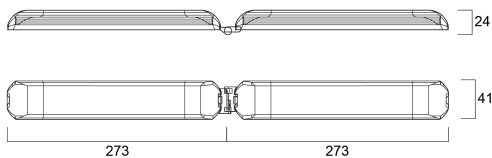

Photométrie

EMERGENCY PACK MANUAL TESTING 6V-55V

Code article 0046600

SYLVANIA

Données générales

Nom du produit	EMERGENCY PACK MANUAL TESTING 6V- 55V
Technologie	Emergency Pack
General application	Education, Hospitality, Office, Retail
ETIM Class	EC000471
Warranty	3 ans

Données physiques

Poids (kg)	0.47
------------	------

Emballage

Product EAN number	5410288466002
Longueur simple de l'emballage (cm)	28.5
Largeur simple de l'emballage (cm)	10.0
Packaging single depth (cm)	4.5
DUN14 (inner)	05410288466002
Units per inner package	1
Units per outer package	25
Packaging outer length / height (cm)	46.0
Packaging outer width (cm)	31.0
Packaging outer depth (cm)	30.0

Sécurité

Utilisation pour applications sèches uniquement	Yes
---	-----