


Flex Pro IP65 4400lm 930

Code article 0068180

SYLVANIA


PROTM

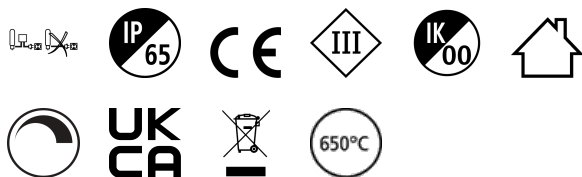

5 metre IP65 LED reel with pre-attached 3M adhesive type; equipped with 600 LEDs; 4400lm per 5m (880lm per 1m); 24V; 3000K; CRI90; R9>50; SDCM≤3; Compatible with emergency packs: 0046600, 0046601

Atouts techniques


Dimensions (mm)

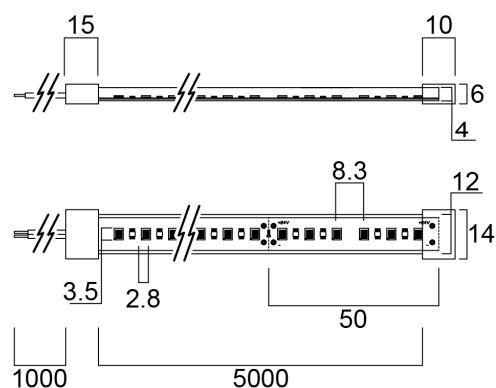

Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	1.46	55°	133
1.0	2.91	55°	33
1.5	4.37	55°	15
2.0	5.82	55°	9
2.5	7.28	55°	6
3.0	8.73	55°	4

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (half beam angle: 111.2°)
C90 - C270 (half beam angle: 111.0°)



Flex Pro IP65 4400lm 930

Code article 0068180

SYLVANIA

Données générales

Nom du produit	Flex Pro IP65 4400lm 930
Technologie	LED
General application	Hospitality
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002706
Numéro virtuel FI	4278335
Warranty	5 ans

Données optiques

Useful luminous flux (Φuse)	4400
Fixture luminous flux (lm)	4400
Luminaire efficacy (lm/W)	92
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Photobiological Risk Group	RG1

Caractéristiques électriques

Power consumption (W)	48
Consommation électrique totale (W)	48
Primary Supply/Product voltage - min (V)	24
Primary Supply/Product voltage - max (V)	24
Electrical protection	Class III
Control gear required	Yes
Dimmable	Yes
Dimming method	Other
Drive current (mA)	2000
Lamp Energy Label (class)	G

Durée de vie

Lifespan L70 B50	54000
Lifespan L70 B10	54000
Lifespan L80 B10	50000
Lifespan L90 B10	44000

Données physiques

Housing colour	Transparent
IP rating	IP65
IK rating	IK00
Longueur (mm)	5000
Largeur (mm)	12
Nominal Product Height (mm)	4
Poids (kg)	0.1

Emballage

Product EAN number	5410288681801
Longueur simple de l'emballage (cm)	23.5
Largeur simple de l'emballage (cm)	22.5
Packaging single depth (cm)	3.0
DUN14 (inner)	15410288681808
Units per outer package	20
Packaging outer length / height (cm)	49.0
Packaging outer width (cm)	35.0
Packaging outer depth (cm)	24.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (°C)	-20-40