


START Panel UGR19 1200x300 3600Lm 830 LILO

Code article 0042836


SYLVANIA

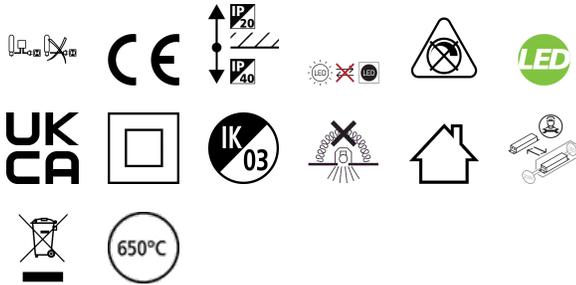

LED Panel with backlit technology, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Extruded aluminium frame, passive cooling. Low glaring UGR<19. RG0, 90 degree beam angle , optical system: PS diffuser with Prismatic finish. Light color temperature: 3000K Warm White, total system power: 36W , total fixture output: 3600lm, efficacy: 100 lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 100,000 hours at 70% of the original output (L70B50), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, non dimmable driver, electrical protection: Class II. Degree of Protection: IP40/IP20, suitable for indoor environment only. Nominal size: 1195x295mm, Loop in / loop out wiring, safety cables included, 25mm nominal height, White color frame, weight: 1,9Kg.

Atouts techniques

Dimensions (mm)

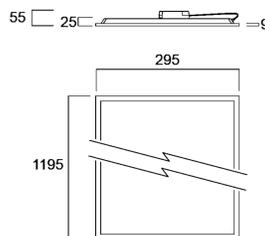


Photométrie

0.5	0.84 0.75	E171 E190 E200	7455 1889 1513
1.0	1.68 1.50	E171 E190 E200	1884 417 483
1.5	2.52 2.27	E171 E190 E200	829 388 291
2.0	3.36 3.16	E171 E190 E200	486 184 113
2.5	4.20 3.96	E171 E190 E200	298 87 72
3.0	5.04 4.74	E171 E190 E200	207 48 30

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 76.0°)
— C90 - C270 (Half beam angle: 80.0°)

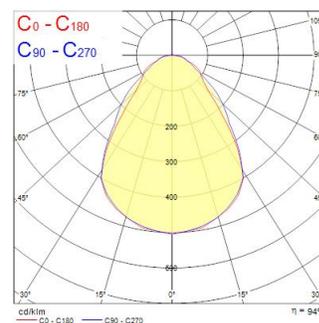

START Panel UGR19 1200x300 3600Lm 830 LILO

Code article 0042836

SYLVANIA

Données générales

Nom du produit	START Panel UGR19 1200x300 3600Lm 830 LILO
Technologie	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium, Steel
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Education, Office
Operating temperature range (°C)	-10°C...+45°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Numéro virtuel FI	4278462
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	3600
Luminaire efficacy (lm/W)	100
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	90
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

Caractéristiques électriques

Consommation électrique totale (W)	36
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20.0
Electrical protection	Class II
Control gear required	Yes
Type d'appareillage	LED driver constant current
No. Of switching cycles before premature failures	>25000
Dimmable	No
Dimming method	N/A
Drive current (mA)	680
Courant d'appel (A)	17
Inrush Duration (µs)	150
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	51
Max. products per 13A C Breaker	66
Max. products per 16A C Breaker	81
Max. products per 20A C Breaker	102
Max. products per 10A B Breaker	33
Max. products per 13A B Breaker	43
Max. products per 16A B Breaker	54
Max. products per 20A B Breaker	68
Connectable conductor cross section - Max (mm ²)	1.5

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	71000

START Panel UGR19 1200x300 3600Lm 830 LILO

Code article 0042836

SYLVANIA

Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Diffuser finish	Prismatic
Diffuser material	Other
Longueur (mm)	1195
Largeur (mm)	295
Nominal Product Height (mm)	26
Poids (kg)	1.908

Emballage

Product EAN number	5410288428369
Longueur simple de l'emballage (cm)	121.1
Largeur simple de l'emballage (cm)	3.8
Packaging single depth (cm)	33.8
DUN14 (inner)	15410288428366
Units per outer package	1
Packaging outer length / height (cm)	121.1
Packaging outer width (cm)	3.8
Packaging outer depth (cm)	33.8

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-10-45