

Raiden Aqua IP66 21KLM 840 Asymmetric DALI 2824169



Features

- Outdoor and indoor floodlight range with in house design, comes complete with 1m flying lead and adjustable bracket, aluminium housing, RAL 9022 - Pearl light grey, clear glass diffuser, IP66, IK08, Class I, 4000K, DALI dimmable, 20200lm, 157W, 129lm/W, CRI80, Asymmetric Wide beam angle 110*50°, 100000 hrs L80B50 lifespan, 511x319x76mm (LxWxH) dimensions, 6.8kg weight. Dedicated for swimming pool area.


Product Overview

Product name	Raiden Aqua IP66 21KLM 840 Asymmetric DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
General application	Logistics & Industry
ETIM Class	EC001744
Fixture luminous flux (lm)	20200
Luminaire efficacy (lm/W)	129
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	Not Applicable
Beam Angle (°)	110*50
Photobiological Risk Group	RG1
Total power consumption (W)	157
Electrical protection	Class I
Dimmable	Yes
Housing colour	RAL 9022 - Pearl light grey
IP rating	IP66
IK rating	IK08
Product EAN number	5025768241699
Warranty	5 years


Concord

Raiden Aqua IP66 21KLM 840 Asymmetric DALI
2824169

Photometry

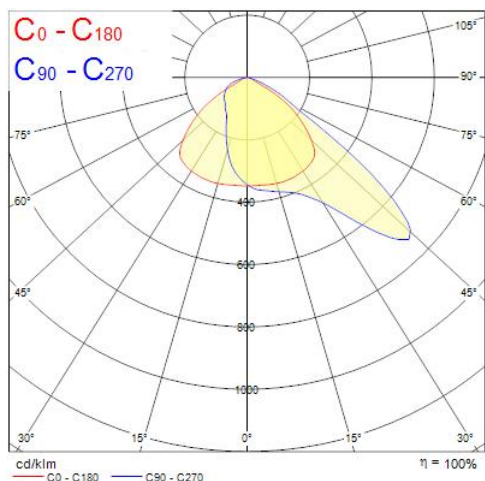

Technical drawings

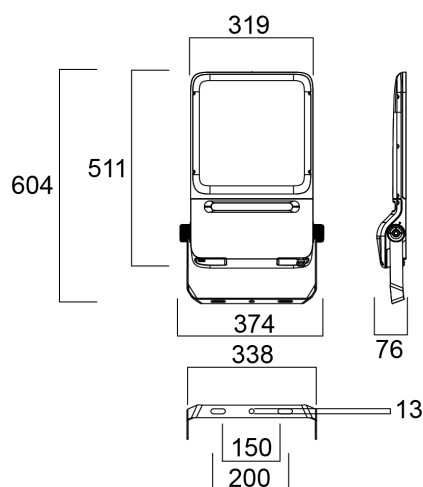

Data table

GENERAL DATA

Product name	Raiden Aqua IP66 21KLM 840 Asymmetric DALI
--------------	--

Raiden Aqua IP66 21KLM 840 Asymmetric DALI 2824169

Technology	LED
Cap/Base	N/A
Housing	Aluminium
General application	Logistics & Industry
Operating temperature range (°C)	-40°C - 50°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	20200
Luminaire efficacy (lm/W)	129
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	Not Applicable
Beam Angle (°)	110*50
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	157
Mains voltage (V)	220-240V~
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Transformer required	No
Dimmable	Yes
Drive current (mA)	3200
Inrush Current (A)	125
Inrush Duration (µs)	200
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz

Raiden Aqua IP66 21KLM 840 Asymmetric DALI 2824169

Max. Luminaires per 10A C Breaker	6
Max. Luminaires per 13A C Breaker	5
Max. Luminaires per 16A C Breaker	6
Max. Luminaires per 20A C Breaker	8
Max. Luminaires per 10A B Breaker	3
Max. Luminaires per 13A B Breaker	3
Max. Luminaires per 16A B Breaker	3
Max. Luminaires per 20A B Breaker	4

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	94000

PHYSICAL DATA

Housing colour	RAL 9022 - Pearl light grey
IP rating	IP66
IK rating	IK08
Nominal Product Length (mm)	511
Nominal Product Width (mm)	319
Nominal Product Height (mm)	76
Nominal Product Diameter (mm)	Not applicable
Weight (kg)	6.8

PACKAGING

Single packaging type	Carton
Product EAN number	5025768241699
Packaging single length / height (cm)	56.0
Packaging single width (cm)	41.5
Packaging single depth (cm)	14.0
DUN14 (outer)	05025768241699
Units per outer package	1
Packaging outer length / height (cm)	56.0
Packaging outer width (cm)	41.5
Packaging outer depth (cm)	14.0

Concord

Raiden Aqua IP66 21KLM 840 Asymmetric DALI
2824169

SAFETY DATA

Optimal operating condition (°C)	-40-50
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No