
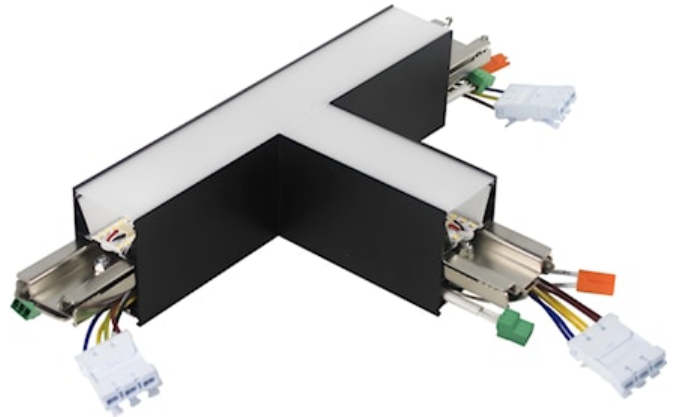


OTAO LINEAR CORN-T OPAL 830/840 BK

Artikelnummer 0040810

SYLVANIA


PROTM

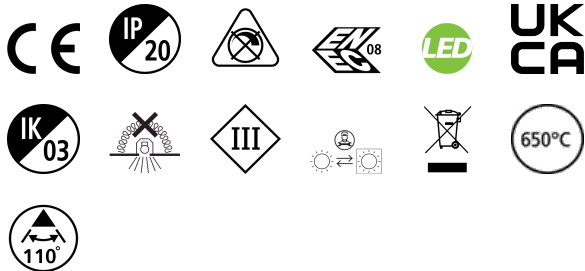

T-shape connection unit for opal diffuser version of Otao Linear range, RAL9011 (black) finishing, direct distribution, only 3000K/4000K LED light sources included, feed by next straight luminaire, shipped with 3x fast connectors and additional replacement electrical connectors, 50mm wide extruded aluminium profile, nominal size: 290x170x50x73mm.

Technische Werte

Größe (mm)

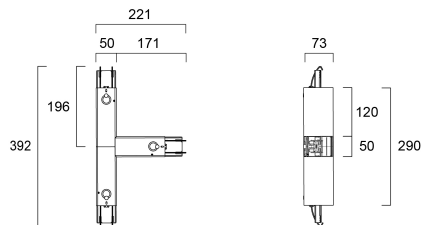

Photometrie

OTAO LINEAR CORN-T OPAL 830/840 BK

Artikelnummer 0040810

SYLVANIA

Allgemeine Daten

Produktname	OTAO LINEAR CORN-T OPAL 830/840 BK
Technologie	LED
Sockel	N/A
Gehäuse	Aluminium
Montage	Ceiling recessed mounting, Ceiling surface mounting, Wall surface mounted, Suspended
Built in presence detector	NONE
Allgemeine Anwendungsbereiche	Office, Education
Umgebungstemperaturbereich	5°C...+50°C
Virtual assistant compatibility	N/A
ETIM Klasse	EC002556
E-Nummer FI	4170664
Garantie	5 Jahre

Optische Daten

Leuchtenlichtstrom (lm)	950
Systemeffizienz (lm/W)	127
Lichtfarbe	Warm White or Neutral White
Farbwiedergabeindex (Ra)	80
Farbkonsistenz (SDCM)	SDCM3
Ausstrahlungswinkel (°)	110
Distributionstyp	Symmetric
Blendungsbegrenzung	< 28
Photobiological Risk Group	RG0

Elektrische Daten

Leistungsaufnahme gesamt (W)	7.5
Primary Supply/Product voltage - min (V)	30.0
Primary Supply/Product voltage - max (V)	38.0
Elektrische Schutzklasse	Class III
Dimmbar	No
Dimming method	N/A
Energy Efficiency Class (A->G) of contained light source	C, C(more than 1 Light Source)
Nennfrequenz (Hz)	DC

Lifetime data

Lebensdauer - L70B50	100000
Lebensdauer - L80B50	100000

Physikalische Daten

Gehäusefarbe	RAL 9011 - Graphite black
IP Schutzart	IP20
IK Schutzart	IK03
Diffusor	Opal
Diffusormaterial	PC Polycarbonate
Länge (mm)	170
Breite (mm)	50
Nominale Produkthöhe (mm)	73
Gewicht (kg)	1.1

Packaging

EAN Code	5410288408101
Einzelverpackung Länge (cm)	40.0
Einzelverpackung Breite (cm)	8.0
Einzelverpackung Tiefe (cm)	23.0
DUN 14 (außen)	15410288408108
Anzahl an Einheiten je Außenverpackung	5
Außenverpackung Länge (cm)	42.0
Außenverpackung Breite (cm)	25.0
Außenverpackung Tiefe (cm)	42.0

OTAO LINEAR CORN-T OPAL 830/840 BK

Artikelnummer 0040810



Safety data

Glühdrahttest (°C)	650
Optimale Betriebstemperatur (°C)	5-50