

Pixo Line 1500 UGR19 830 Black

Code article 0007827

SYLVANIA


PROTM



Pixo Line is a linear track system, adds flexibility to any space due the variety of product options Offers an easy installation with two separate modules Push-in/push-out mechanism with GR6d-15 connector Compatible with Zhaga Book 14 Aluminium body, plastic end caps,aluminised plastic low glare optics in a single line configuration, light beam angle:70° Textured black finishing colour. Light color temperature: 3000K, warm white, max. system power: 50W Max. fixture lumen output: 7300lm, efficacy: 146lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation Multipower driver module with 8 power settings meet all installation needs with one single product, selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class III. Degree of protection: IP20, suitable for indoor environment only Light modules should be combined with suitable in-track drivers Nominal product dimensions: L.1464mmx37.4mmx37mm

Atouts techniques

Dimensions (mm)

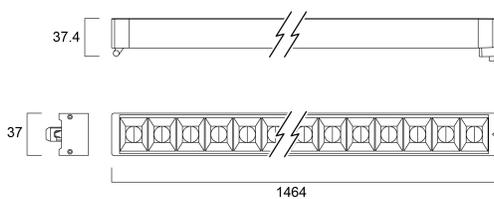

Photométrie

0.5	0.66 0.68	E(0°) E(C90) 33.8° E(C00) 34.8°	1581 985 982
1.0	1.33 1.37	E(0°) E(C90) 33.8° E(C00) 34.8°	3296 985 982
1.5	1.99 2.06	E(0°) E(C90) 33.8° E(C00) 34.8°	1909 499 424
2.0	2.66 2.75	E(0°) E(C90) 33.8° E(C00) 34.8°	848 247 239
2.5	3.32 3.44	E(0°) E(C90) 33.8° E(C00) 34.8°	543 158 152
3.0	3.99 4.12	E(0°) E(C90) 33.8° E(C00) 34.8°	377 110 106

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 65.0°)
— C90 - C270 (Half beam angle: 67.2°)

Pixo Line 1500 UGR19 830 Black

Code article 0007827

SYLVANIA

Données physiques

Housing colour	Black
IP rating	IP20
IK rating	IK03
Longueur (mm)	1464
Largeur (mm)	37
Nominal Product Height (mm)	37.4
Poids (kg)	0.9

Emballage

Product EAN number	5410288078274
Longueur simple de l'emballage (cm)	147.0
Largeur simple de l'emballage (cm)	4.3
Packaging single depth (cm)	4.3
DUN14 (inner)	15410288078271
Units per outer package	10
Packaging outer length / height (cm)	149.0
Packaging outer width (cm)	24.0
Packaging outer depth (cm)	11.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-40