


RANA NEO 4300LM S 1500 830 CC EM 1L WHITE

Code article 0054252

SYLVANIA


PROTM

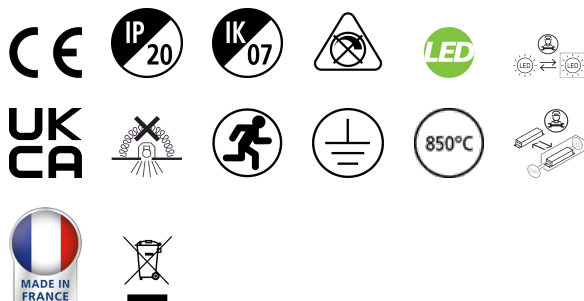

Surface or Suspended LED luminaire with Micro Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 1447x187x56mm, White body colour, IP20, IK07, Constant Current, Emergency 3 hours, Low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 4400lm, 38W, 115lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<18, Luminance at 65° < 3000 cd/m2, Lifespan: 96,000 hours L80B20, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.

Atouts techniques

Dimensions (mm)

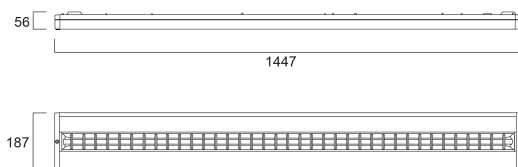


Photométrie

0.5	0.90 0.67	S/D S/C90 S/C180	1192 2442 3457
1.0	1.80 1.34	S/D S/C90 S/C180	2373 5110 6915
1.5	2.70 2.02	S/D S/C90 S/C180	3554 7665 10372
2.0	3.60 2.69	S/D S/C90 S/C180	4735 10220 13824
2.5	4.50 3.36	S/D S/C90 S/C180	5916 12775 17280
3.0	5.40 4.03	S/D S/C90 S/C180	7097 15330 20736

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (half beam angle: 67.5°)
— C90 - C270 (half beam angle: 64.0°)



RANA NEO 4300LM S 1500 830 CC EM 1L WHITE

Code article 0054252

SYLVANIA

Données générales

Nom du produit	RANA NEO 4300LM S 1500 830 CC EM 1L WHITE
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Ceiling surface mounting, Suspended
General application	Education, Office
Operating temperature range (°C)	0°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	4400
Luminaire efficacy (lm/W)	116
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 18
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80
Emergency duration (h)	3

Caractéristiques électriques

Consommation électrique totale (W)	38
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	SylSmart Standalone (SSC)
Drive current (mA)	300
Courant d'appel (A)	12
Inrush Duration (µs)	25
Energy Efficiency Class (A->G) of contained light source	C, D(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	24
Max. products per 13A C Breaker	32
Max. products per 16A C Breaker	39
Max. products per 20A C Breaker	49
Max. products per 10A B Breaker	24
Max. products per 13A B Breaker	32
Max. products per 16A B Breaker	39
Max. products per 20A B Breaker	49

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	96000

RANA NEO 4300LM S 1500 830 CC EM 1L WHITE

Code article 0054252



Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Longueur (mm)	1440
Largeur (mm)	187
Nominal Product Height (mm)	47
Poids (kg)	4.2

Emballage

Product EAN number	5410288542522
Longueur simple de l'emballage (cm)	153.5
Largeur simple de l'emballage (cm)	6.5
Packaging single depth (cm)	21.0
DUN14 (inner)	05410288542522
Units per outer package	1
Packaging outer length / height (cm)	153.5
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	21.0

Sécurité

Glow Wire Test (°C)	850
---------------------	-----