


# Inset Trend 75 SW IP44 OUTDOOR AN NO-LMP

Code article 0099390

**SYLVANIA**


**PRO**<sup>TM</sup>

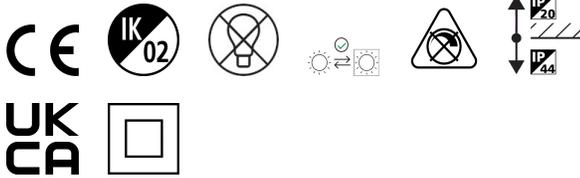

INSET TREND SW IP44 OUTD AN EX LMP is the recessed housing frame to use with RefLED GU10 spotlight lamp Ø50mm - GU10 spotlight not included. Aluminium body, round bezel ring in anthracite finish, IP44 degree of protection, class II, Suitable for outdoor environment.

## Atouts techniques

### Dimensions (mm)

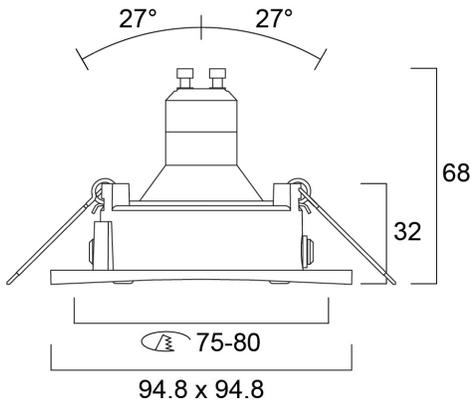

### Photométrie

# Inset Trend 75 SW IP44 OUTDOOR AN NO-LMP

Code article 0099390

**SYLVANIA**

## Données générales

|                                  |  |
|----------------------------------|--|
| Nom du produit                   | Inset Trend 75 SW IP44 OUTDOOR AN NO-LMP |
| Technologie                      | Light Source Not Integrated              |
| Cap/Base                         | GU10                                     |
| Housing                          | Aluminium                                |
| Montage                          | Ceiling recessed mounting                |
| Built in presence detector       | NONE                                     |
| Environment                      | Outdoor                                  |
| General application              | Hospitality, Residential & Consumer      |
| Operating temperature range (°C) | -10°C...+40°C                            |
| Virtual assistant compatibility  | N/A                                      |
| ETIM Class                       | EC001744                                 |
| Numéro virtuel FI                | 4279663                                  |
| Warranty                         | 5 ans                                    |

## Données optiques

|                                 |                |
|---------------------------------|----------------|
| Fixture luminous flux (lm)      | 1              |
| Couleur de lumière              | N/A            |
| Colour Variation Initial (SDCM) | N/A            |
| Distribution type               | Symmetric      |
| Photobiological Risk Group      | Not applicable |

## Caractéristiques électriques

|  |                             |
|--|-----------------------------|
| Lampe incluse  | Fixture without Lightsource |
| Consommation électrique totale (W)                               | 0.1                         |
| Actuel (A)   | 0.001                       |
| Primary Supply/Product voltage - min (V)                         | 220.0                       |
| Primary Supply/Product voltage - max (V)                         | 240.0                       |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x % | 1                           |
| Electrical protection  | Class II                    |
| Control gear required  | No                          |
| Type d'appareillage  | Not required                |
| Dimmable   | No                          |
| Dimming method   | N/A                         |
| Nominal Frequency (Hz)   | 50/60Hz                     |
| Max. products per 10A C Breaker                                  | 20                          |
| Max. products per 16A C Breaker                                  | 30                          |
| Connectable conductor cross section - Max (mm <sup>2</sup> )     | 1.5                         |

## Données physiques

|                               |                |
|-------------------------------|----------------|
| Housing colour                | Anthracite     |
| IP rating                     | IP44/20        |
| IK rating                     | IK02           |
| Diffuser finish               | Other          |
| Diffuser material             | None           |
| Finition réflecteur           | Not Applicable |
| Nominal Product Height (mm)   | 100            |
| Nominal Product Diameter (mm) | 95             |
| Built-in diameter (mm)        | 75             |
| Poids (kg)                    | 0.177          |
| Recessed Depth (mm)           | 100            |

# Inset Trend 75 SW IP44 OUTDOOR AN NO-LMP

Code article 0099390

**SYLVANIA**

## Emballage

|                                      |                |
|--------------------------------------|----------------|
| Product EAN number                   | 5410288993904  |
| Longueur simple de l'emballage (cm)  | 13.0           |
| Largeur simple de l'emballage (cm)   | 10.0           |
| Packaging single depth (cm)          | 8.5            |
| DUN14 (inner)                        | 15410288993901 |
| Units per outer package              | 30             |
| Packaging outer length / height (cm) | 52.5           |
| Packaging outer width (cm)           | 27.5           |
| Packaging outer depth (cm)           | 28.0           |

## Sécurité

|   |        |
|---|--------|
| Condition de fonctionnement optimal (° C) | -10-40 |
|---|--------|