


# SYLPROOF TOLEDO T8 L600 750LM 840 SINGLE

Code article 0090066

**SYLVANIA**

Your**Home**<sup>TM</sup>

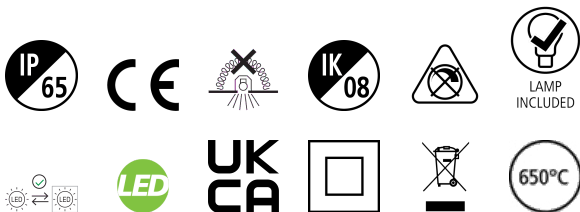

Weatherproof luminaire delivered together with exchangeable ToLEDo T8 LED tubes. Easy to install with stainless steel fixing brackets for ceiling mounting. Polycarbonate housing and diffuser. 4000K; 6.6W; 750lm; 114lm/W and 25,000 hours lifetime. IP65; IK08; Class II; 670mm x 60mm x 65mm

## Atouts techniques

### Photométrie

#### Données générales

|                                  |                                          |
|----------------------------------|------------------------------------------|
| Nom du produit                   | SYLPROOF TOLEDO T8 L600 750LM 840 SINGLE |
| Technologie                      | LED                                      |
| Cap/Base                         | 2G13                                     |
| Housing                          | PC Polycarbonate                         |
| Montage                          | Wall surface mounted                     |
| Built in presence detector       | NONE                                     |
| General application              | Logistics & Industry                     |
| Operating temperature range (°C) | -20°C...+40°C                            |
| Virtual assistant compatibility  | N/A                                      |
| ETIM Class                       | EC002892                                 |
| Warranty                         | 3 ans                                    |

#### Données optiques

|                                 |            |
|---------------------------------|------------|
| Fixture luminous flux (lm)      | 750        |
| Luminaire efficacy (lm/W)       | 114        |
| Température de couleur (K)      | 4000       |
| Couleur de lumière              | Cool White |
| IRC (Ra)                        | 80         |
| Colour Variation Initial (SDCM) | SDCM6      |
| Beam Angle (°)                  | 120        |
| Distribution type               | Symmetric  |
| Photobiological Risk Group      | RG1        |

# SYLPROOF TOLEDO T8 L600 750LM 840 SINGLE

Code article 0090066

**SYLVANIA**

## Caractéristiques électriques

|                                                                  |              |
|------------------------------------------------------------------|--------------|
| Lampe incluse                                                    | 0030237      |
| Consommation électrique totale (W)                               | 6.6          |
| Primary Supply/Product voltage - min (V)                         | 220.0        |
| Primary Supply/Product voltage - max (V)                         | 240.0        |
| Lamp power factor                                                | 0.9          |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x % | 30           |
| Electrical protection                                            | Class II     |
| Type d'appareillage                                              | Not required |
| Dimmable                                                         | No           |
| Dimming method                                                   | N/A          |
| Courant d'appel (A)                                              | 9.2          |
| Inrush Duration (µs)                                             | 256          |
| Energy Efficiency Class (A->G) of contained light source         | D            |
| Nominal Frequency (Hz)                                           | 50/60Hz      |
| Max. products per 10A C Breaker                                  | 65           |
| Max. products per 16A C Breaker                                  | 104          |
| Max. products per 16A B Breaker                                  | 63           |
| Connectable conductor cross section - Max (mm²)                  | 1.5          |

## Durée de vie

|                  |       |
|------------------|-------|
| Lifespan L70 B50 | 25000 |
|------------------|-------|

## Données physiques

|                             |                  |
|-----------------------------|------------------|
| Housing colour              | Grey             |
| IP rating                   | IP65             |
| IK rating                   | IK08             |
| Diffuser finish             | Transparent      |
| Diffuser material           | PC Polycarbonate |
| Longueur (mm)               | 670              |
| Largeur (mm)                | 65               |
| Nominal Product Height (mm) | 60               |
| Poids (kg)                  | 0.5              |

## Emballage

|                                      |                |
|--------------------------------------|----------------|
| Product EAN number                   | 5410288900667  |
| Longueur simple de l'emballage (cm)  | 69.0           |
| Largeur simple de l'emballage (cm)   | 6.6            |
| Packaging single depth (cm)          | 6.3            |
| DUN14 (inner)                        | 15410288900664 |
| Units per outer package              | 12             |
| Packaging outer length / height (cm) | 71.0           |
| Packaging outer width (cm)           | 21.0           |
| Packaging outer depth (cm)           | 30.0           |

## Sécurité

|                                           |        |
|-------------------------------------------|--------|
| Glow Wire Test (°C)                       | 650    |
| Condition de fonctionnement optimal (° C) | -20-40 |