

# Raiden IP66 12KLM 840 Asymmetric Wide

Code article 2824066


Concord




Outdoor and indoor floodlight range with in house design, comes complete with 1m flying lead and adjustable bracket, aluminium housing, RAL 9022 - Pearl light grey, clear glass diffuser, IP66, IK08, Class I, 4000K, Non-dimming, 12100lm, 90W, 134lm/W, CRI80, Asymmetric Wide beam angle 110\*50°, 100000 hrs L90B50 lifespan, 511x319x76mm (LxWxH) dimensions, 6.1kg weight. Ball-impact-resistance according to DIN57710-13 VDE 0710 13/5.81, DIN 18032-3 only with the separate wire guard accessory fitted.

## Atouts techniques

### Dimensions (mm)

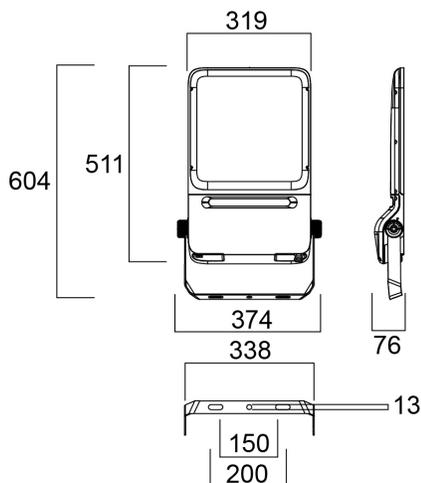

### Photométrie



# Raiden IP66 12KLM 840 Asymmetric Wide

Code article 2824066

Concord

## Données générales

Nom du produit	Raiden IP66 12KLM 840 Asymmetric Wide
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
General application	Logistics & Industry
Operating temperature range (°C)	-40°C...+50°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	12100
Luminaire efficacy (lm/W)	134
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	110*50
Photobiological Risk Group	RG1

## Caractéristiques électriques

Consommation électrique totale (W)	90
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Control gear required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	1820
Courant d'appel (A)	70
Inrush Duration (µs)	200
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	10
Max. products per 13A C Breaker	12
Max. products per 16A C Breaker	16
Max. products per 20A C Breaker	20
Max. products per 10A B Breaker	6
Max. products per 13A B Breaker	7
Max. products per 16A B Breaker	9
Max. products per 20A B Breaker	12
Mains surge immunity (differential mode -> L-N) (kV)	6
Mains surge immunity (common mode -> L/N - GND) (kV)	10

## Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B50	100000

# Raiden IP66 12KLM 840 Asymmetric Wide

Code article 2824066

**Concord**

## Données physiques

Housing colour	RAL 9022 - Pearl light grey
IP rating	IP66
IK rating	IK08
Longueur (mm)	511
Largeur (mm)	319
Nominal Product Height (mm)	76
Poids (kg)	6.1

## Emballage

Product EAN number	5025768240661
Longueur simple de l'emballage (cm)	56.0
Largeur simple de l'emballage (cm)	41.5
Packaging single depth (cm)	14.0
DUN14 (inner)	05025768240661
Units per outer package	1
Packaging outer length / height (cm)	56.0
Packaging outer width (cm)	41.5
Packaging outer depth (cm)	14.0

## Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-40-50