

SylSpot RGBW 360LM SST

Code article 0090096


SYLVANIA



Experience dynamic lighting with a smart spotlight offering customizable RGB colours and adjustable tunable white lighting, tailored for you. Change spotlight colours to match your mood or decor with more than 16 million colour combinations. Customise lighting from warm cosy to bright daylight (2700-6500K) for a perfect ambiance anytime, anywhere. Works effortlessly with SylSmart App, SylRemote and Alexa, Google Assistant and Siri shortcuts for seamless control and convenience. Adjust brightness from 1% to 100% with wireless dimming function for the ideal light settings. Transform space with pre-set scenes and sync RGB lights with music for an immersive experience. Easy installation: loop-in/loop-out wiring with fast terminals.

Atouts techniques

Dimensions (mm)

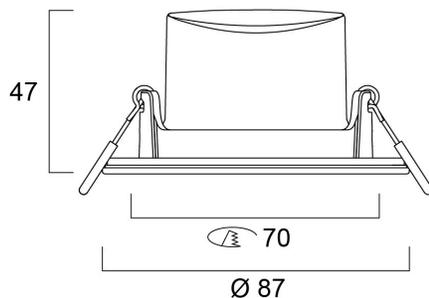

Photométrie

SylSpot RGBW 360LM SST

Code article 0090096

SYLVANIA

Données générales

Nom du produit	SylSpot RGBW 360LM SST
Technologie	LED
Cap/Base	N/A
Housing	Composite material
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Residential & Consumer
Operating temperature range (°C)	-10°C...+40°C
Virtual assistant compatibility	Amazon Alexa
ETIM Class	EC001744
Numéro virtuel FI	4279565
Warranty	3 ans

Données optiques

Fixture luminous flux (lm)	360
Luminaire efficacy (lm/W)	75
Température de couleur (K)	4000
Couleur de lumière	RGB+Tuneable White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Distribution type	None
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	4.8
Actuel (A)	0.02
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.45
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	170
Electrical protection	Class II
Type d'appareillage	Not required
Dimmable	Yes
Dimming method	SylSmart SST
Min. drive current (mA)	120
Max. drive current (mA)	120
Drive current - Range (mA)	120mA / 120mA
Courant d'appel (A)	11
Inrush Duration (µs)	100
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	90
Max. products per 16A C Breaker	100
Max. products per 16A B Breaker	60
Connectable conductor cross section - Min (mm ²)	0.75
Connectable conductor cross section - Max (mm ²)	1.5

Durée de vie

Lifespan L70 B50

25000

SylSpot RGBW 360LM SST

Code article 0090096

SYLVANIA

Données physiques

Housing colour	White
IP rating	IP44
IK rating	IK03
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Finition réflecteur	Not Applicable
Nominal Product Height (mm)	47
Nominal Product Diameter (mm)	87
Poids (kg)	0.07

Emballage

Product EAN number	5410288900964
Longueur simple de l'emballage (cm)	9.0
Largeur simple de l'emballage (cm)	6.0
Packaging single depth (cm)	9.0
DUN14 (inner)	15410288900961
Units per inner package	6
Packaging inner length / height (cm)	28.5
Packaging inner width (cm)	7.5
Packaging inner depth (cm)	19.0
DUN14 (outer)	25410288900968
Units per outer package	48
Packaging outer length / height (cm)	32.0
Packaging outer width (cm)	30.0
Packaging outer depth (cm)	40.5

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-10-40