

# Start Flood IP65 7000LM 840 Black

Code article 0050166

**SYLVANIA**


**START**<sup>TM</sup>



The streamlined, durable, lightweight die-cast aluminium body makes Start Flood IP65 a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 7000 lm, 58 W, 121 lm/W, 4000K, non dimmable, CRI>80, IP65, IK06, Class I, lifespan L70:B50: 120000 hrs, 151 x 193 x 30 mm (L x W x H). Weight: 0.665 kg.

## Atouts techniques


### Dimensions (mm)

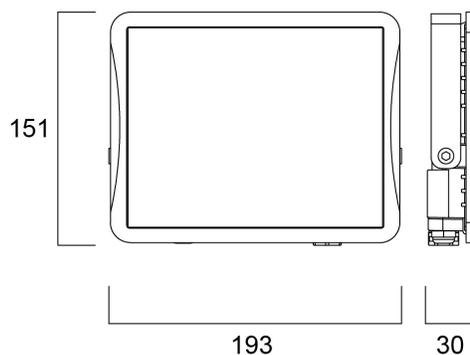

### Photométrie

Distance [m]	Cone diameter [m]	E107 [lx]	E100 [lx]	E50 [lx]
0.5	1.45 1.50	1007	572	224
1.0	2.89 3.00	254	219	219
1.5	4.43 4.50	112	112	112
2.0	5.98 6.00	61	61	61
2.5	7.47 7.50	42	42	42
3.0	8.96 9.00	30	30	30

Distance [m]    Cone diameter [m]    Illuminance [lx]  
 — C0 - C180 (Half beam angle: 112.0°)  
 — C90 - C270 (Half beam angle: 112.4°)

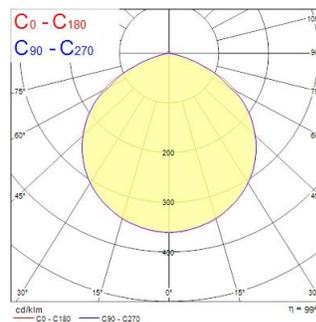

# Start Flood IP65 7000LM 840 Black

Code article 0050166

**SYLVANIA**

## Données générales

Nom du produit	Start Flood IP65 7000LM 840 Black
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Wall surface mounted, Ceiling surface mounting
Built in presence detector	NONE
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Numéro virtuel FI	4579633
Warranty	3 ans

## Données optiques

Fixture luminous flux (lm)	7000
Luminaire efficacy (lm/W)	121
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	110
Distribution type	Symmetric
Photobiological Risk Group	RG1

## Caractéristiques électriques

Consommation électrique totale (W)	58
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Type d'appareillage	Not required
No. Of switching cycles before premature failures	>15000
Dimmable	No
Dimming method	N/A
Drive current (mA)	236
Courant d'appel (A)	1
Inrush Duration (µs)	100
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	22
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	35
Max. products per 20A C Breaker	43
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	21
Max. products per 20A B Breaker	26
Connectable conductor cross section - Min (mm <sup>2</sup> )	1
Connectable conductor cross section - Max (mm <sup>2</sup> )	1

## Durée de vie

Lifespan L70 B50	120000
Lifespan L80 B50	104000
Lifespan L80 B20	75000

# Start Flood IP65 7000LM 840 Black

Code article 0050166

**SYLVANIA**

## Données physiques

Housing colour	Black
IP rating	IP65
IK rating	IK06
Diffuser finish	Transparent
Diffuser material	Glass
Finition réflecteur	Not Applicable
Longueur (mm)	151
Largeur (mm)	193
Nominal Product Height (mm)	30
Poids (kg)	0.665

## Emballage

Product EAN number	5410288501666
Longueur simple de l'emballage (cm)	20.5
Largeur simple de l'emballage (cm)	4.5
Packaging single depth (cm)	18.0
DUN14 (inner)	15410288501663
Units per outer package	6
Packaging outer length / height (cm)	30.0
Packaging outer width (cm)	20.2
Packaging outer depth (cm)	20.0

## Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-40