


# Kalani IP66 26KLM 830 ASYM

Code article 0048531


**SYLVANIA**

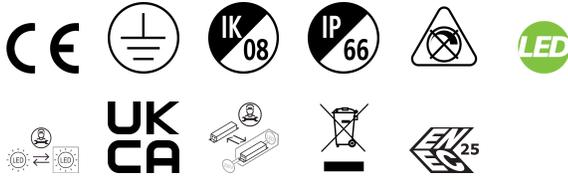


Exterior LED Floodlight, comes complete with 1500mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, IP66, IK08, Class I, 3000K, Non-dimming, 25100lm, 200W, 126lm/W, CRI80, Asymmetrical Wide beam angle (65° x 120° imax@55°), 100000 hrs L80B20 lifespan, 494 x 395 x 87mm (LxWxD) dimensions, 6.2kg weight.

## Atouts techniques

### Dimensions (mm)

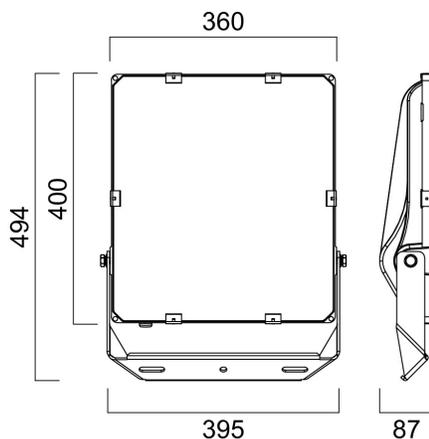

### Photométrie



# Kalani IP66 26KLM 830 ASYM

Code article 0048531

**SYLVANIA**

## Données générales

Nom du produit	Kalani IP66 26KLM 830 ASYM
Technologie	LED
Cap/Base	N/A
General application	Logistics & Industry
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Numéro virtuel FI	4579562
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	25100
Luminaire efficacy (lm/W)	126
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	65*120
Photobiological Risk Group	RG1

## Caractéristiques électriques

Consommation électrique totale (W)	200
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.98
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
Drive current (mA)	3850
Courant d'appel (A)	60
Inrush Duration (µs)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	2
Max. products per 13A C Breaker	3
Max. products per 16A C Breaker	4
Max. products per 20A C Breaker	5
Max. products per 10A B Breaker	1
Max. products per 13A B Breaker	2
Max. products per 16A B Breaker	3
Max. products per 20A B Breaker	4
Mains surge immunity (differential mode -> L-N) (kV)	6
Mains surge immunity (common mode -> L/N - GND) (kV)	10

## Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	100000

# Kalani IP66 26KLM 830 ASYM

Code article 0048531



## Données physiques

IP rating	IP66
IK rating	IK08
Longueur (mm)	494
Largeur (mm)	395
Nominal Product Height (mm)	87
Poids (kg)	6.2

## Emballage

Product EAN number	5410288485317
Longueur simple de l'emballage (cm)	57.0
Largeur simple de l'emballage (cm)	14.0
Packaging single depth (cm)	43.0
DUN14 (inner)	05410288485317
Units per outer package	1
Packaging outer length / height (cm)	57.0
Packaging outer width (cm)	14.0
Packaging outer depth (cm)	43.0