

START SPOT KIT ROUND 345LM 840 DIM ADJ IP20 WHT

Code article 0005557


SYLVANIA



Recessed spotlight Kit with RefLED Superia GU10 LED spotlight lamp Ø50mm. Aluminium body, round bezel ring in White RAL9003 finish, vertical tilt 27°, IP20 degree of protection, class II. LED lamp included. Outer dimensions: Ø85*64mm, cut-out Ø75-78mm. Suitable for internal environment only.

Atouts techniques

Dimensions (mm)

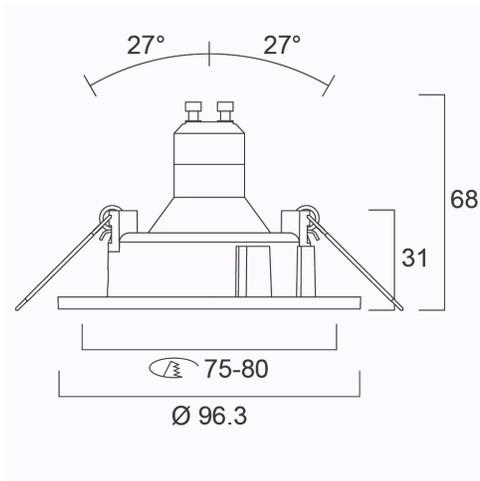


Photométrie

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [in]	Beam diameter [ft]	Illuminance [lx]
0.5	0.30	0.30	1.18"	3.87'	2770
			1.18"	3.87'	1711
			1.18"	3.87'	1507
1.0	0.60	0.61	2.36"	7.74'	644
			2.36"	7.74'	428
			2.36"	7.74'	417
1.5	0.90	0.91	3.54"	11.61'	430
			3.54"	11.61'	190
			3.54"	11.61'	151
2.0	1.20	1.22	4.72"	15.49'	236
			4.72"	15.49'	157
			4.72"	15.49'	151
2.5	1.50	1.52	5.90"	19.36'	181
			5.90"	19.36'	98
			5.90"	19.36'	87
3.0	1.80	1.82	7.08"	23.22'	155
			7.08"	23.22'	84
			7.08"	23.22'	81

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 33.9°) — C90 - C270 (Half beam angle: 33.4°)



START SPOT KIT ROUND 345LM 840 DIM ADJ IP20 WHT

Code article 0005557

SYLVANIA

Données générales

Nom du produit	START SPOT KIT ROUND 345LM 840 DIM ADJ IP20 WHT
Technologie	LED
Housing	Aluminium
Montage	Ceiling recessed mounting
Environment	Indoor
General application	Retail
ETIM Class	EC001744
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	345
Luminaire efficacy (lm/W)	76
Température de couleur (K)	4000
Colour Code	840
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	36
Distribution type	Symmetric
Photobiological Risk Group	RG1

Caractéristiques électriques

Lampe incluse	0029128
Consommation électrique totale (W)	4.5
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.7
Electrical protection	Class II
Control gear required	No
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Courant d'appel (A)	10
Inrush Duration (µs)	100
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	100
Max. products per 13A C Breaker	130
Max. products per 16A C Breaker	160
Max. products per 20A C Breaker	200

Durée de vie

Lifespan L70 B50	25000
------------------	-------

Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK03
Nominal Product Height (mm)	64
Nominal Product Diameter (mm)	85
Poids (kg)	0.13

START SPOT KIT ROUND 345LM 840 DIM ADJ IP20 WHT

Code article 0005557

SYLVANIA

Emballage

Product EAN number	5410288055572
Longueur simple de l'emballage (cm)	13.3
Largeur simple de l'emballage (cm)	10.1
Packaging single depth (cm)	7.0
DUN14 (inner)	15410288055579
Units per inner package	1
Units per outer package	30
Packaging outer length / height (cm)	53.0
Packaging outer width (cm)	28.0
Packaging outer depth (cm)	23.0

Sécurité

Glow Wire Test (°C)	650
---------------------	-----