

Solstice 150 1300lm 940 DALI

Code article 2070132


Concord



The Solstice 150 1300lm 940 DALI is a high efficient DALI dimmable downlight luminaire, Colour rendering index $R_a > 90$, Colour temperature: 4000K Neutral White, Class II, Protection rating IP40/IP20, Cut out dimensions: 150mm.

Atouts techniques


Dimensions (mm)

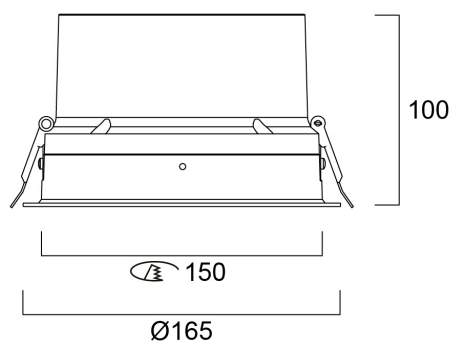

Photométrie

0.5	0.67	507 500	33.7°	424 1334
1.0	1.33	507 500	33.7°	1099 333
1.5	2.00	507 500	33.7°	470 148
2.0	2.67	507 500	33.7°	285 88
2.5	3.33	507 500	33.7°	189 58
3.0	4.00	507 500	33.7°	118 37

Distance [m] Cone diameter [m]
— C0 - C180 (Half beam angle: 67.4°) Illuminance [lx]



Solstice 150 1300lm 940 DALI

Code article 2070132

Concord

Données générales

Nom du produit	Solstice 150 1300lm 940 DALI
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Hospitality, Office, Retail
Operating temperature range (°C)	-10°C...+40°C
Performance ambient temperature Tq (°C)	40
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Numéro virtuel FI	4262053
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	1300
Luminaire efficacy (lm/W)	130
LOR (%)	100
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	90
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	70
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

Caractéristiques électriques

Consommation électrique totale (W)	10
Actuel (A)	250
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.96
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class II
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	DALI, DALI-2, Switch-dim (mains-rated)
Minimum dimming level (%)	1
Drive current (mA)	250
Courant d'appel (A)	15
Inrush Duration (µs)	243
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	40
Max. products per 13A C Breaker	56
Max. products per 16A C Breaker	64
Max. products per 20A C Breaker	80
Max. products per 10A B Breaker	24
Max. products per 13A B Breaker	31
Max. products per 16A B Breaker	38
Max. products per 20A B Breaker	48
Connectable conductor cross section - Min (mm²)	0.5
Connectable conductor cross section - Max (mm²)	2.5

Solstice 150 1300lm 940 DALI

Code article 2070132

Concord

Durée de vie

Lifespan L70 B50	120000
Lifespan L80 B20	120000
Lifespan L80 B10	120000
Lifespan L90 B10	108000

Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK02
Diffuser finish	Diffuse
Diffuser material	PC Polycarbonate
Finition réflecteur	High-gloss
Nominal Product Height (mm)	100
Nominal Product Diameter (mm)	165
Built-in diameter (mm)	150
Max. Lamp Diameter (mm) - D	165
Poids (kg)	0.95
Recessed Depth (mm)	150

Emballage

Product EAN number	5025768701322
Longueur simple de l'emballage (cm)	30.3
Largeur simple de l'emballage (cm)	30.3
Packaging single depth (cm)	18.0
DUN14 (inner)	05025768701322
Units per outer package	1
Packaging outer length / height (cm)	30.3
Packaging outer width (cm)	30.3
Packaging outer depth (cm)	18.0

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-10-40