


SYLPROOF TOLEDO T8 L1200 1550LM 840 SINGLE

Code article 0090068

SYLVANIA

Your**Home**TM

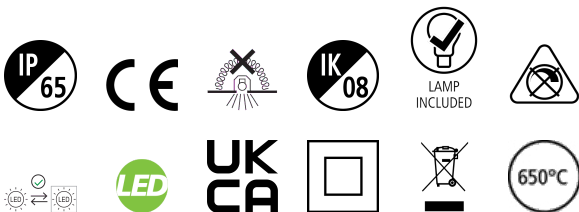

Weatherproof luminaire delivered together with exchangeable ToLEDo T8 LED tubes. Easy to install with stainless steel fixing brackets for ceiling mounting. Polycarbonate housing and diffuser. 4000K; 13.3W; 1550lm; 117lm/W and 25,000 hours lifetime. IP65; IK08; Class II; 1280mm x 60mm x 65mm

Atouts techniques

Photométrie

Données générales

Nom du produit	SYLPROOF TOLEDO T8 L1200 1550LM 840 SINGLE
Technologie	LED
Cap/Base	2G13
Housing	PC Polycarbonate
Montage	Wall surface mounted
Built in presence detector	NONE
General application	Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	3 ans

Données optiques

Fixture luminous flux (lm)	1550
Luminaire efficacy (lm/W)	117
Température de couleur (K)	4000
Couleur de lumière	Cool White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	120
Distribution type	Symmetric
Photobiological Risk Group	RG1

SYLPROOF TOLEDO T8 L1200 1550LM 840 SINGLE

Code article 0090068

SYLVANIA

Caractéristiques électriques

Lampe incluse	0030240
Consommation électrique totale (W)	13.3
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class II
Type d'appareillage	Not required
Dimmable	No
Dimming method	N/A
Courant d'appel (A)	10.4
Inrush Duration (µs)	260
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	58
Max. products per 16A C Breaker	92
Max. products per 16A B Breaker	55
Connectable conductor cross section - Max (mm²)	1.5

Durée de vie

Lifespan L70 B50	25000
------------------	-------

Données physiques

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Longueur (mm)	1280
Largeur (mm)	65
Nominal Product Height (mm)	60
Poids (kg)	0.8

Emballage

Product EAN number	5410288900681
Longueur simple de l'emballage (cm)	130.0
Largeur simple de l'emballage (cm)	6.6
Packaging single depth (cm)	6.3
DUN14 (inner)	15410288900688
Units per outer package	12
Packaging outer length / height (cm)	133.0
Packaging outer width (cm)	21.0
Packaging outer depth (cm)	30.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-40