

# OPTIX RECESSED 1250X310 2L TW WHT DALI

Code article 2023698


Concord



OPTIX RECESSED 1250X310 2L TW WHT DALI is a high efficacy low glare luminaire for office and education applications. Ceiling recessed 1250x310 mm. White plastic low glare optics in 2 lines configuration. White RAL9016 fixture body. DALI DT8 controlled tunable white light engine, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3450lm. Power consumption 24W. Luminaire efficacy 144lm/W. Lifespan: 48,500 hours L90B10. UGR<19, Luminance at 65°<3000 Cd/m2, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C.

## Atouts techniques

### Dimensions (mm)

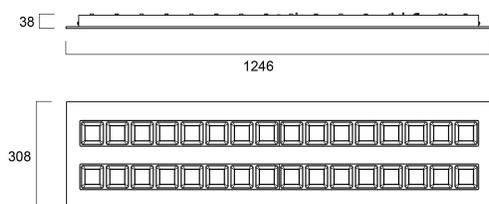

### Photométrie

Distance [m]	Cone diameter [m]	E107	E108	E109	E110	E111	E112	E113	E114	E115	E116	E117	E118	E119	E120	E121	E122	E123	E124	E125	E126	E127	E128	E129	E130	E131	E132	E133	E134	E135	E136	E137	E138	E139	E140	E141	E142	E143	E144	E145	E146	E147	E148	E149	E150	E151	E152	E153	E154	E155	E156	E157	E158	E159	E160	E161	E162	E163	E164	E165	E166	E167	E168	E169	E170	E171	E172	E173	E174	E175	E176	E177	E178	E179	E180	E181	E182	E183	E184	E185	E186	E187	E188	E189	E190	E191	E192	E193	E194	E195	E196	E197	E198	E199	E200																																																																																																																																																																																																																																																																																																																																																																																																																																												
0.5	0.91	7492	1913	1573	1373	1246	1150	1080	1020	960	900	840	780	720	660	600	540	480	420	360	300	240	180	120	60	0	60	120	180	240	300	360	420	480	540	600	660	720	780	840	900	960	1020	1080	1150	1246	1373	1573	1913	2400	3000	3600	4200	4800	5400	6000	6600	7200	7800	8400	9000	9600	10200	10800	11500	12460	13730	15730	19130	24000	30000	36000	42000	48000	54000	60000	66000	72000	78000	84000	90000	96000	102000	108000	115000	124600	137300	157300	191300	240000	300000	360000	420000	480000	540000	600000	660000	720000	780000	840000	900000	960000	1020000	1080000	1150000	1246000	1373000	1573000	1913000	2400000	3000000	3600000	4200000	4800000	5400000	6000000	6600000	7200000	7800000	8400000	9000000	9600000	10200000	10800000	11500000	12460000	13730000	15730000	19130000	24000000	30000000	36000000	42000000	48000000	54000000	60000000	66000000	72000000	78000000	84000000	90000000	96000000	102000000	108000000	115000000	124600000	137300000	157300000	191300000	240000000	300000000	360000000	420000000	480000000	540000000	600000000	660000000	720000000	780000000	840000000	900000000	960000000	1020000000	1080000000	1150000000	1246000000	1373000000	1573000000	1913000000	2400000000	3000000000	3600000000	4200000000	4800000000	5400000000	6000000000	6600000000	7200000000	7800000000	8400000000	9000000000	9600000000	10200000000	10800000000	11500000000	12460000000	13730000000	15730000000	19130000000	24000000000	30000000000	36000000000	42000000000	48000000000	54000000000	60000000000	66000000000	72000000000	78000000000	84000000000	90000000000	96000000000	102000000000	108000000000	115000000000	124600000000	137300000000	157300000000	191300000000	240000000000	300000000000	360000000000	420000000000	480000000000	540000000000	600000000000	660000000000	720000000000	780000000000	840000000000	900000000000	960000000000	1020000000000	1080000000000	1150000000000	1246000000000	1373000000000	1573000000000	1913000000000	2400000000000	3000000000000	3600000000000	4200000000000	4800000000000	5400000000000	6000000000000	6600000000000	7200000000000	7800000000000	8400000000000	9000000000000	9600000000000	10200000000000	10800000000000	11500000000000	12460000000000	13730000000000	15730000000000	19130000000000	24000000000000	30000000000000	36000000000000	42000000000000	48000000000000	54000000000000	60000000000000	66000000000000	72000000000000	78000000000000	84000000000000	90000000000000	96000000000000	102000000000000	108000000000000	115000000000000	124600000000000	137300000000000	157300000000000	191300000000000	240000000000000	300000000000000	360000000000000	420000000000000	480000000000000	540000000000000	600000000000000	660000000000000	720000000000000	780000000000000	840000000000000	900000000000000	960000000000000	1020000000000000	1080000000000000	1150000000000000	1246000000000000	1373000000000000	1573000000000000	1913000000000000	2400000000000000	3000000000000000	3600000000000000	4200000000000000	4800000000000000	5400000000000000	6000000000000000	6600000000000000	7200000000000000	7800000000000000	8400000000000000	9000000000000000	9600000000000000	10200000000000000	10800000000000000	11500000000000000	12460000000000000	13730000000000000	15730000000000000	19130000000000000	24000000000000000	30000000000000000	36000000000000000	42000000000000000	48000000000000000	54000000000000000	60000000000000000	66000000000000000	72000000000000000	78000000000000000	84000000000000000	90000000000000000	96000000000000000	102000000000000000	108000000000000000	115000000000000000	124600000000000000	137300000000000000	157300000000000000	191300000000000000	240000000000000000	300000000000000000	360000000000000000	420000000000000000	480000000000000000	540000000000000000	600000000000000000	660000000000000000	720000000000000000	780000000000000000	840000000000000000	900000000000000000	960000000000000000	1020000000000000000	1080000000000000000	1150000000000000000	1246000000000000000	1373000000000000000	1573000000000000000	1913000000000000000	2400000000000000000	3000000000000000000	3600000000000000000	4200000000000000000	4800000000000000000	5400000000000000000	6000000000000000000	6600000000000000000	7200000000000000000	7800000000000000000	8400000000000000000	9000000000000000000	9600000000000000000	10200000000000000000	10800000000000000000	11500000000000000000	12460000000000000000	13730000000000000000	15730000000000000000	19130000000000000000	24000000000000000000	30000000000000000000	36000000000000000000	42000000000000000000	48000000000000000000	54000000000000000000	60000000000000000000	66000000000000000000	72000000000000000000	78000000000000000000	84000000000000000000	90000000000000000000	96000000000000000000	102000000000000000000	108000000000000000000	115000000000000000000	124600000000000000000	137300000000000000000	157300000000000000000	191300000000000000000	240000000000000000000	300000000000000000000	360000000000000000000	420000000000000000000	480000000000000000000	540000000000000000000	600000000000000000000	660000000000000000000	720000000000000000000	780000000000000000000	840000000000000000000	900000000000000000000	960000000000000000000	1020000000000000000000	1080000000000000000000	1150000000000000000000	1246000000000000000000	1373000000000000000000	1573000000000000000000	1913000000000000000000	2400000000000000000000	3000000000000000000000	3600000000000000000000	4200000000000000000000	4800000000000000000000	5400000000000000000000	6000000000000000000000	6600000000000000000000	7200000000000000000000	7800000000000000000000	8400000000000000000000	9000000000000000000000	9600000000000000000000	10200000000000000000000	10800000000000000000000	11500000000000000000000	12460000000000000000000	13730000000000000000000	15730000000000000000000	19130000000000000000000	24000000000000000000000	30000000000000000000000	36000000000000000000000	42000000000000000000000	48000000000000000000000	54000000000000000000000	60000000000000000000000	66000000000000000000000	72000000000000000000000	78000000000000000000000	84000000000000000000000	90000000000000000000000	96000000000000000000000	102000000000000000000000	108000000000000000000000	115000000000000000000000	124600000000000000000000	137300000000000000000000	157300000000000000000000	191300000000000000000000	240000000000000000000000	300000000000000000000000	360000000000000000000000	420000000000000000000000	480000000000000000000000	540000000000000000000000	600000000000000000000000	660000000000000000000000	720000000000000000000000	780000000000000000000000	840000000000000000000000	900000000000000000000000	960000000000000000000000	1020000000000000000000000	1080000000000000000000000	1150000000000000000000000	1246000000000000000000000	1373000000000000000000000	1573000000000000000000000	1913000000000000000000000	2400000000000000000000000	3000000000000000000000000	3600000000000000000000000	4200000000000000000000000	4800000000000000000000000	5400000000000000000000000	6000000000000000000000000	6600000000000000000000000	7200000000000000000000000	7800000000000000000000000	8400000000000000000000000	9000000000000000000000000	9600000000000000000000000	10200000000000000000000000	10800000000000000000000000	11500000000000000000000000	12460000000000000000000000	13730000000000000000000000	15730000000000000000000000	19130000000000000000000000	24000000000000000000000000	30000000000000000000000000	36000000000000000000000000	42000000000000000000000000	48000000000000000000000000	54000000000000000000000000	60000000000000000000000000	66000000000000000000000000	72000000000000000000000000	78000000000000000000000000	84000000000000000000000000	90000000000000000000000000	96000000000000000000000000	102000000000000000000000000	108000000000000000000000000	115000000000000000000000000	124600000000000000000000000	137300000000000000000000000	157300000000000000000000000	191300000000000000000000000	240000000000000000000000000	300000000000000000000000000	360000000000000000000000000	420000000000000000000000000	480000000000000000000000000	540000000000000000000000000	600000000000000000000000000	660000000000000000000000000	720000000000000000000000000	780000000000000000000000000	840000000000000000000000000	900000000000000000000000000	960000000000000000000000000	1020000

# OPTIX RECESSED 1250X310 2L TW WHT DALI

Code article 2023698

Concord

## Données générales

Nom du produit	OPTIX RECESSED 1250X310 2L TW WHT DALI
Technologie	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Montage	Ceiling recessed mounting
Built in presence detector	NONE
Fixture rating	Enclosed
General application	Education, Office
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	3600
Luminaire efficacy (lm/W)	120
Couleur de lumière	Tuneable White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1

## Caractéristiques électriques

Consommation électrique totale (W)	30
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.97
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Drive current (mA)	600
Courant d'appel (A)	29
Inrush Duration (µs)	180
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	36
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm <sup>2</sup> )	2.5
Connectable conductor cross section - Max (mm <sup>2</sup> )	2.5

## Durée de vie

Lifespan L70 B50	120000
Lifespan L80 B20	107500
Lifespan L90 B10	48500

# OPTIX RECESSED 1250X310 2L TW WHT DALI

Code article 2023698

**Concord**

## Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Longueur (mm)	1246
Largeur (mm)	308.5
Nominal Product Height (mm)	38
Poids (kg)	5.7

## Emballage

Product EAN number	5025768236985
Longueur simple de l'emballage (cm)	137.0
Largeur simple de l'emballage (cm)	36.0
Packaging single depth (cm)	9.0
DUN14 (inner)	05025768236985
Units per outer package	1
Packaging outer length / height (cm)	137.0
Packaging outer width (cm)	36.0
Packaging outer depth (cm)	9.0

## Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	10-25