


START Panel UGR19 1200x300 DALI 3800Lm 840

Code article 0042861


SYLVANIA

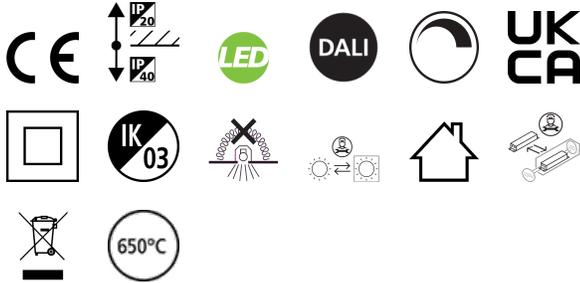

LED Panel with backlit technology, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Extruded aluminium frame, passive cooling. Low glaring UGR<19. RG0, 90 degree beam angle , optical system: PS diffuser with Opal finish. Light color temperature: 4000K Neutral White, total system power: 36W , total fixture output: 3800lm, efficacy: 106 lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 100,000 hours at 70% of the original output (L70B50), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, DALI dimmable driver, electrical protection: Class II. Degree of Protection: IP40/IP20, suitable for indoor environment only. Nominal size: 1195x295mm, safety cables included, 25mm nominal height, White color frame, weight: 1,9Kg.

Atouts techniques

Dimensions (mm)

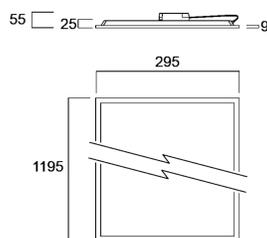


Photométrie

0.5	0.81 0.83	E171 E100 E100	750 1538 1743
1.0	1.62 1.65	E171 E100 E100	1890 394 438
1.5	2.73 2.48	E171 E100 E100	840 111 134
2.0	3.64 3.31	E171 E100 E100	472 98 109
2.5	4.55 4.14	E171 E100 E100	302 61 70
3.0	5.46 4.96	E171 E100 E100	210 43 48

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 78.2°)
— C90 - C270 (Half beam angle: 84.6°)

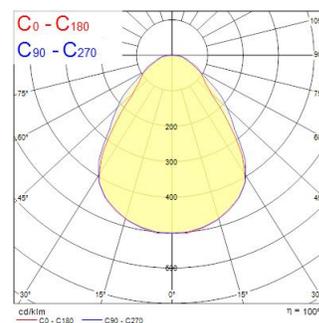

START Panel UGR19 1200x300 DALI 3800Lm 840

Code article 0042861

SYLVANIA

Données générales

Nom du produit	START Panel UGR19 1200x300 DALI 3800Lm 840
Technologie	LED
Cap/Base	N/A
Housing	Aluminium, Steel
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Education, Office
Operating temperature range (°C)	-10°C...+45°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Numéro virtuel FI	4278482
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	3800
Luminaire efficacy (lm/W)	106
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	90
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

Caractéristiques électriques

Consommation électrique totale (W)	36
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20.0
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Drive current (mA)	680
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	51
Max. products per 13A C Breaker	66
Max. products per 16A C Breaker	81
Max. products per 20A C Breaker	102
Max. products per 10A B Breaker	33
Max. products per 13A B Breaker	43
Max. products per 16A B Breaker	54
Max. products per 20A B Breaker	68
Connectable conductor cross section - Max (mm ²)	1.5

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	71000

START Panel UGR19 1200x300 DALI 3800Lm 840

Code article 0042861

SYLVANIA

Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Diffuser finish	Diffuse
Diffuser material	Other
Longueur (mm)	1195
Largeur (mm)	295
Nominal Product Height (mm)	25
Poids (kg)	2.062

Emballage

Product EAN number	5410288428611
Longueur simple de l'emballage (cm)	120.7
Largeur simple de l'emballage (cm)	3.8
Packaging single depth (cm)	38.6
DUN14 (inner)	15410288428618
Units per outer package	1
Packaging outer length / height (cm)	120.7
Packaging outer width (cm)	3.8
Packaging outer depth (cm)	38.6

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-10-45