


Pixo Line 1500 UGR19 840 Black

Code article 0007826

SYLVANIA


PROTM

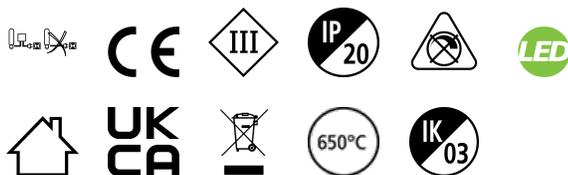

Pixo Line is a linear track system, adds flexibility to any space due the variety of product options Offers an easy installation with two separate modules Push-in/push-out mechanism with GR6d-15 connector Compatible with Zhaga Book 14 Aluminium body, plastic end caps,aluminised plastic low glare optics in a single line configuration, light beam angle:70° Textured black finishing colour. Light color temperature: 4000K, neutral white, max. system power: 50W Max. fixture lumen output: 7500lm, efficacy: 150lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation Multipower driver module with 8 power settings meet all installation needs with one single product, selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class III. Degree of protection: IP20, suitable for indoor environment only Light modules should be combined with suitable in-track drivers Nominal product dimensions: L.1464mmx37.4mmx37mm

Atouts techniques

Dimensions (mm)

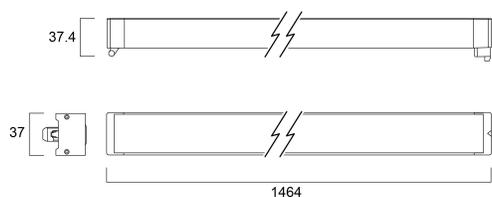

Photométrie

| | | | |
|-----|--------------|---------------------------|---------------------|
| 0.5 | 0.64 0.70 | E(0°) E(10°) E(30°) | 8717 288 2427 |
| 1.0 | 1.28 1.39 | E(0°) E(10°) E(30°) | 2179 87 607 |
| 1.5 | 1.93 2.09 | E(0°) E(10°) E(30°) | 969 279 270 |
| 2.0 | 2.57 2.78 | E(0°) E(10°) E(30°) | 545 187 182 |
| 2.5 | 3.21 3.48 | E(0°) E(10°) E(30°) | 368 130 97 |
| 3.0 | 3.85 4.17 | E(0°) E(10°) E(30°) | 262 97 67 |

Distance [m] Cone diameter [m] Illuminance [lx]


— C0 - C180 (Half beam angle: 65.6°)

— C90 - C270 (Half beam angle: 65.4°)

Pixo Line 1500 UGR19 840 Black

Code article 0007826

SYLVANIA

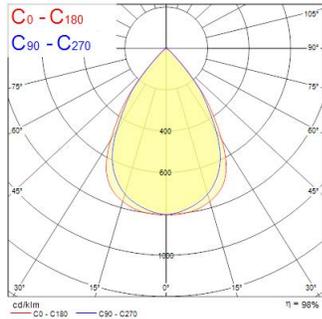

Données générales

| | |
|----------------------------------|--|
| Nom du produit | Pixo Line 1500 UGR19 840 Black |
| Technologie | LED |
| Cap/Base | N/A |
| Montage | Track mounting |
| General application | Retail, Hospitality, Museums & Galleries, Office |
| Operating temperature range (°C) | -20°C...+40°C |
| Virtual assistant compatibility | N/A |
| ETIM Class | EC000996 |
| Numéro virtuel FI | 4279411 |
| Warranty | 5 ans |

Données optiques

| | |
|---------------------------------|----------------|
| Fixture luminous flux (lm) | 7500 |
| Luminaire efficacy (lm/W) | 130 |
| Température de couleur (K) | 4000 |
| Couleur de lumière | Neutral White |
| IRC (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM3 |
| Beam Angle (°) | 70 |
| Glare control | < 19 |
| Photobiological Risk Group | Not applicable |

Caractéristiques électriques

| | |
|--|-----------|
| Consommation électrique totale (W) | 50 |
| Actuel (A) | 1.05 |
| Primary Supply/Product voltage - min (V) | 220.0 |
| Primary Supply/Product voltage - max (V) | 240.0 |
| Electrical protection | Class III |
| Control gear required | Yes |
| Dimmable | No |
| Dimming method | N/A |
| Energy Efficiency Class (A->G) of contained light source | D |
| Nominal Frequency (Hz) | N/A |

Durée de vie

| | |
|------------------|-------|
| Lifespan L70 B50 | 90000 |
| Lifespan L70 B20 | 90000 |
| Lifespan L70 B10 | 90000 |
| Lifespan L80 B50 | 90000 |
| Lifespan L80 B20 | 79000 |
| Lifespan L80 B10 | 76000 |
| Lifespan L90 B50 | 43000 |
| Lifespan L90 B20 | 37000 |
| Lifespan L90 B10 | 36000 |

Pixo Line 1500 UGR19 840 Black

Code article 0007826

SYLVANIA

Données physiques

| | |
|-----------------------------|-------|
| Housing colour | Black |
| IP rating | IP20 |
| IK rating | IK03 |
| Longueur (mm) | 1464 |
| Largeur (mm) | 37 |
| Nominal Product Height (mm) | 37.4 |
| Poids (kg) | 0.9 |

Emballage

| | |
|--------------------------------------|----------------|
| Product EAN number | 5410288078267 |
| Longueur simple de l'emballage (cm) | 147.0 |
| Largeur simple de l'emballage (cm) | 4.3 |
| Packaging single depth (cm) | 4.3 |
| DUN14 (inner) | 15410288078264 |
| Units per outer package | 10 |
| Packaging outer length / height (cm) | 149.0 |
| Packaging outer width (cm) | 24.0 |
| Packaging outer depth (cm) | 11.0 |

Sécurité

| | |
|---|--------|
| Glow Wire Test (°C) | 650 |
| Condition de fonctionnement optimal (° C) | -20-40 |