


START Panel UGR19 625x625 4000Lm 865 LILO

Code article 0042847


SYLVANIA

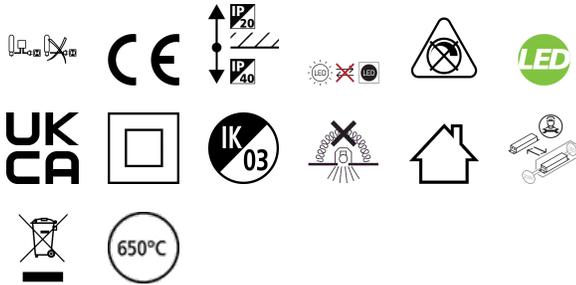

LED Panel with backlit technology, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Extruded aluminium frame, passive cooling. Low glaring UGR<19. RG0, 90 degree beam angle , optical system: PS diffuser with Prismatic finish. Light color temperature: 6500K Cool White, total system power: 36W , total fixture output: 4000lm, efficacy: 111 lm/W, Ra80 typical, LED chromacity: 6 step MacAdam ellipse (SDCM6), lifespan: 100,000 hours at 70% of the original output (L70B50), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, non dimmable driver, electrical protection: Class II. Degree of Protection: IP40/IP20, suitable for indoor environment only. Nominal size: 620x620mm, Loop in / loop out wiring, saftey cables included, 25mm nominal height, White color frame, weight: 1,8Kg.

Atouts techniques

Dimensions (mm)

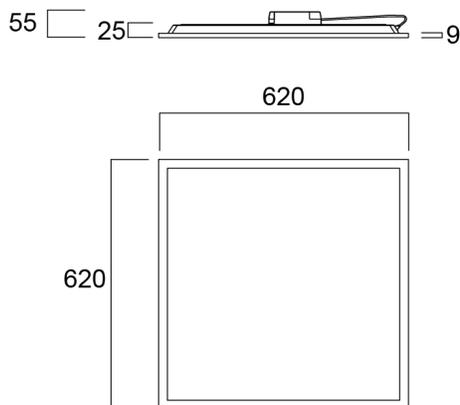


Photométrie

0.5	0.52 0.90	507 E(C90) 42° E(C0) 38°	803 180 190
1.0	1.04 1.81	507 E(C90) 42° E(C0) 38°	201 396 423
1.5	2.76 2.41	507 E(C90) 42° E(C0) 38°	389 137 211
2.0	3.65 3.22	507 E(C90) 42° E(C0) 38°	500 180 178
2.5	4.60 4.02	507 E(C90) 42° E(C0) 38°	350 164 178
3.0	5.52 4.82	507 E(C90) 42° E(C0) 38°	222 144 153

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 75.9°)
— C90 - C270 (Half beam angle: 85.2°)



START Panel UGR19 625x625 4000Lm 865 LILO

Code article 0042847

SYLVANIA

Données générales

Nom du produit	START Panel UGR19 625x625 4000Lm 865 LILO
Technologie	LED
Cap/Base	N/A
Housing	Aluminium, Steel
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Education, Office
Operating temperature range (°C)	-10°C...+45°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	4000
Luminaire efficacy (lm/W)	111
Température de couleur (K)	6500
Couleur de lumière	Cool White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	90
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

Caractéristiques électriques

Consommation électrique totale (W)	36
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20.0
Electrical protection	Class II
Control gear required	Yes
Type d'appareillage	LED driver constant current
No. Of switching cycles before premature failures	>25000
Dimmable	No
Dimming method	N/A
Drive current (mA)	680
Courant d'appel (A)	17
Inrush Duration (µs)	150
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	51
Max. products per 13A C Breaker	66
Max. products per 16A C Breaker	81
Max. products per 20A C Breaker	102
Max. products per 10A B Breaker	33
Max. products per 13A B Breaker	43
Max. products per 16A B Breaker	54
Max. products per 20A B Breaker	68
Connectable conductor cross section - Max (mm ²)	1.5

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	71000

START Panel UGR19 625x625 4000Lm 865 LILO

Code article 0042847

SYLVANIA

Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Diffuser finish	Prismatic
Diffuser material	Other
Longueur (mm)	620
Largeur (mm)	620
Nominal Product Height (mm)	26
Poids (kg)	1.77

Emballage

Product EAN number	5410288428475
Longueur simple de l'emballage (cm)	62.5
Largeur simple de l'emballage (cm)	67.5
Packaging single depth (cm)	3.8
DUN14 (inner)	15410288428472
Units per outer package	4
Packaging outer length / height (cm)	72.0
Packaging outer width (cm)	67.0
Packaging outer depth (cm)	17.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-10-45