

ToLEDo Retro GLS 470LM RGBW SST

Code article 0030107


SYLVANIA



An exquisite glass spiral filament LED lamp with RGB and tuneable white capabilities, providing endless colours and adaptable lighting for every occasion. Same size as traditional lamps, hassle-free upgrade to Smart energy-efficient LED lighting. Transform space with pre-set scenes and sync RGB lights with music for an immersive experience. More than 16 million colour combinations to choose from. Customise lighting from warm cosy to bright daylight (2700-6500K) for the ideal settings. Works effortlessly with SylSmart Home App, SylRemote, Amazon Alexa, Google Assistant and Siri Shortcuts for seamless control and convenience. Adjustable brightness from 1% to 100% with wireless dimming function for perfect illumination. Sparkling light effect.

Atouts techniques

Dimensions (mm)

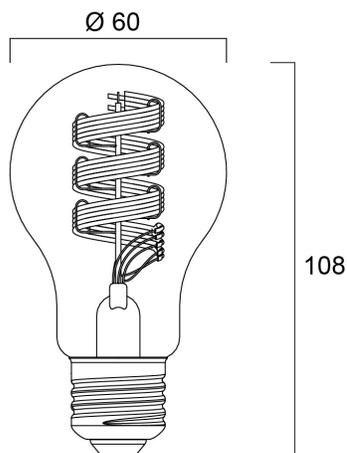

Photométrie

ToLEDo Retro GLS 470LM RGBW SST

Code article 0030107

SYLVANIA

Données générales

Nom du produit	ToLEDo Retro GLS 470LM RGBW SST
Technologie	LED
Lamp shape	Pear-shape
Cap/Base	E27
Lamp finish	Other
Fixture rating	Open
General application	Hospitality, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+40°C
Virtual assistant compatibility	Amazon Alexa, Google Assistant
ETIM Class	EC001959
Numéro virtuel FI	4741195
Warranty	3 ans

Données optiques

Useful luminous flux (Φuse)	470
Couleur de lumière	RGBW
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1

Caractéristiques électriques

Power consumption (W)	6.3
Wattage (W)	6.3
Equivalent watt (W)	40
Actuel (A)	0.045
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
Dimmable	Yes
Courant d'appel (A)	3.6
Inrush Duration (µs)	120
Lamp Energy Label (class)	G
Nominal Frequency (Hz)	50/60Hz

Durée de vie

Lifespan L70 B50	15000
------------------	-------

Données physiques

IP rating	IP20
Longueur (mm)	108
Nominal Product Diameter (mm)	60
Poids (kg)	0.059

Emballage

Product EAN number	5410288301075
Longueur simple de l'emballage (cm)	6.6
Largeur simple de l'emballage (cm)	6.6
Packaging single depth (cm)	12.0
DUN14 (inner)	15410288301072
Units per outer package	6
Packaging outer length / height (cm)	20.6
Packaging outer width (cm)	13.9
Packaging outer depth (cm)	13.0

Sécurité

Condition de fonctionnement optimal (° C)	-20-40
Consignes de nettoyage en cas de bris	Not applicable
Lampe à objectif spécial	No
Utilisation pour applications sèches uniquement	Yes
Ne convient pas à l'éclairage résidentiel	Yes
Safety message	Not Suitable for totally enclosed fixtures