

Resisto 1500 IP66 DALI 7600lm 840

Code article 0010260

SYLVANIA


PROTM



Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 7600lm; 55W; 138lm/W; 4000K; SDCM<5; DALI dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1500mm x 89mm x 88mm; D-mark.

Atouts techniques


Dimensions (mm)

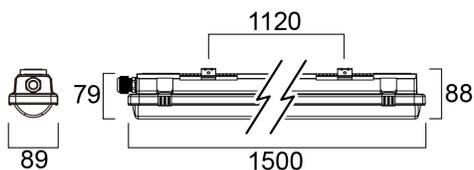

Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Illuminance [lx]
0.5	1.39 1.25	51°	54.2"	1037 1016 1254
1.0	2.77 2.51	51°	54.2"	2534 254 254
1.5	4.16 3.76	51°	54.2"	1138 113 137
2.0	5.55 5.01	51°	54.2"	634 634 137
2.5	6.93 6.26	51°	54.2"	456 44 49
3.0	8.32 7.52	51°	54.2"	352 35 34

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 102.3°)
 — C90 - C270 (Half beam angle: 108.4°)

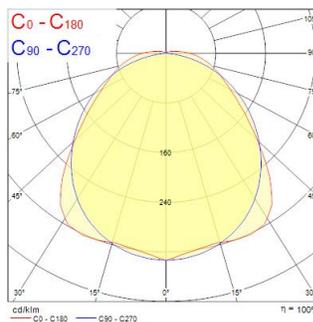

Resisto 1500 IP66 DALI 7600lm 840

Code article 0010260

SYLVANIA

Données générales

Nom du produit	Resisto 1500 IP66 DALI 7600lm 840
Technologie	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Montage	Ceiling surface mounting, Suspended, Wall surface mounted
Built in presence detector	NONE
General application	Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Numéro virtuel FI	4357068
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	7600
Luminaire efficacy (lm/W)	138
Température de couleur (K)	4000
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Colour Consistency (SDCM)	5
Beam Angle (°)	110
Distribution type	Diffuse
Glare control	< 25
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	55
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.99
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	9
Electrical protection	Class I
Type d'appareillage	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	350
Courant d'appel (A)	23.1
Inrush Duration (µs)	174
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	35
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	21
Max. products per 20A B Breaker	27
Connectable conductor cross section - Max (mm ²)	2.5

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	69000
Lifespan L90 B10	31000

Resisto 1500 IP66 DALI 7600lm 840

Code article 0010260

SYLVANIA

Données physiques

Housing colour	Grey
IP rating	IP66
IK rating	IK08
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Longueur (mm)	1500
Largeur (mm)	87
Nominal Product Height (mm)	80
Poids (kg)	1.936

Emballage

Product EAN number	5410288102603
Longueur simple de l'emballage (cm)	155.0
Largeur simple de l'emballage (cm)	10.0
Packaging single depth (cm)	9.0
DUN14 (inner)	05410288102603
Units per outer package	1
Packaging outer length / height (cm)	155.0
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	9.0

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-20-40