


# START Panel UGR19 600x600 DALI 3800Lm 830

Code article 0042851


**SYLVANIA**

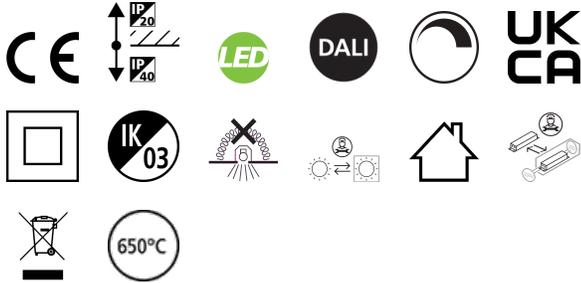

LED Panel with backlit technology, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Extruded aluminium frame, passive cooling. Low glaring UGR<19. RG0, 90 degree beam angle , optical system: PS diffuser with Opal finish. Light color temperature: 3000K Warm White, total system power: 36W , total fixture output: 3800lm, efficacy: 106 lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 100,000 hours at 70% of the original output (L70B50), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, DALI dimmable driver, electrical protection: Class II. Degree of Protection: IP40/IP20, suitable for indoor environment only. Nominal size: 595x595mm, safety cables included, 25mm nominal height, White color frame, weight: 1,6Kg.

## Atouts techniques

### Dimensions (mm)

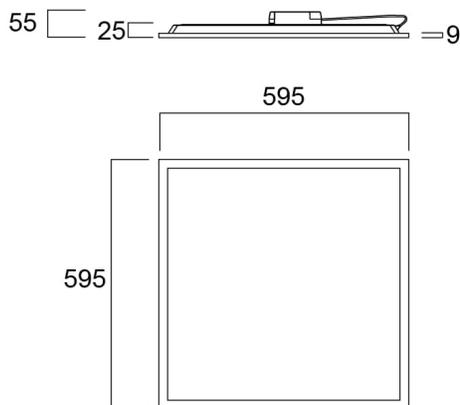


### Photométrie

|     |              |                      |                      |
|-----|--------------|----------------------|----------------------|
| 0.5 | 0.52<br>0.82 | E171<br>E190<br>E198 | 7731<br>1583<br>1752 |
| 1.0 | 1.03<br>1.65 | E171<br>E190<br>E198 | 1933<br>395<br>441   |
| 1.5 | 2.75<br>2.47 | E171<br>E190<br>E198 | 359<br>171<br>191    |
| 2.0 | 3.67<br>3.30 | E171<br>E190<br>E198 | 483<br>97<br>112     |
| 2.5 | 4.58<br>4.12 | E171<br>E190<br>E198 | 309<br>62<br>71      |
| 3.0 | 5.50<br>4.95 | E171<br>E190<br>E198 | 215<br>43<br>50      |

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 75.0°)  
— C90 - C270 (Half beam angle: 85.0°)

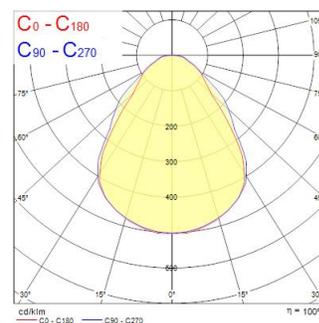

# START Panel UGR19 600x600 DALI 3800Lm 830

Code article 0042851

**SYLVANIA**

## Données générales

|   |   |
|---|---|
| Nom du produit                          | START Panel UGR19 600x600 DALI 3800Lm 830 |
| Technologie                             | LED                                       |
| Cap/Base                                | N/A                                       |
| Housing                                 | Aluminium, Steel                          |
| Montage                                 | Ceiling recessed mounting                 |
| Built in presence detector              | NONE                                      |
| General application                     | Education, Office                         |
| Operating temperature range (°C)        | -10°C...+45°C                             |
| Performance ambient temperature Tq (°C) | 25  |
| Virtual assistant compatibility         | N/A                                       |
| ETIM Class                              | EC002892                                  |
| Numéro virtuel FI                       | 4278464                                   |
| Warranty                                | 5 ans                                     |

## Données optiques

|                                 |            |
|---------------------------------|------------|
| Fixture luminous flux (lm)      | 3800       |
| Luminaire efficacy (lm/W)       | 106        |
| Température de couleur (K)      | 3000       |
| Couleur de lumière              | Warm White |
| IRC (Ra)                        | 80         |
| Colour Variation Initial (SDCM) | SDCM3      |
| Beam Angle (°)                  | 90         |
| Distribution type               | Symmetric  |
| Glare control                   | < 19       |
| Photobiological Risk Group      | RG0        |

## Caractéristiques électriques

|  |                             |
|--|-----------------------------|
| Consommation électrique totale (W)                               | 36                          |
| Primary Supply/Product voltage - min (V)                         | 220                         |
| Primary Supply/Product voltage - max (V)                         | 240                         |
| Lamp power factor  | 0.9                         |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x % | 20.0                        |
| Electrical protection  | Class II                    |
| Type d'appareillage  | LED driver constant current |
| Dimmable   | Yes                         |
| Dimming method   | DALI                        |
| Drive current (mA)   | 680                         |
| Energy Efficiency Class (A->G) of contained light source         | D                           |
| Nominal Frequency (Hz)   | 50/60Hz                     |
| LED Flickering Rate  | Ultra low (5% or less)      |
| Max. products per 10A C Breaker                                  | 51                          |
| Max. products per 13A C Breaker                                  | 66                          |
| Max. products per 16A C Breaker                                  | 81                          |
| Max. products per 20A C Breaker                                  | 102                         |
| Max. products per 10A B Breaker                                  | 33                          |
| Max. products per 13A B Breaker                                  | 43                          |
| Max. products per 16A B Breaker                                  | 54                          |
| Max. products per 20A B Breaker                                  | 68                          |
| Connectable conductor cross section - Max (mm <sup>2</sup> )     | 1.5                         |

## Durée de vie

|                  |        |
|------------------|--------|
| Lifespan L70 B50 | 100000 |
| Lifespan L80 B20 | 71000  |

# START Panel UGR19 600x600 DALI 3800Lm 830

Code article 0042851

**SYLVANIA**

## Données physiques

|                             |                         |
|-----------------------------|-------------------------|
| Housing colour              | RAL 9003 - Signal white |
| IP rating                   | IP40/20                 |
| IK rating                   | IK03                    |
| Diffuser finish             | Diffuse                 |
| Diffuser material           | Other                   |
| Longueur (mm)               | 595                     |
| Largeur (mm)                | 595                     |
| Nominal Product Height (mm) | 25                      |
| Poids (kg)                  | 1.948                   |

## Emballage

|                                      |                |
|--------------------------------------|----------------|
| Product EAN number                   | 5410288428512  |
| Longueur simple de l'emballage (cm)  | 60.0           |
| Largeur simple de l'emballage (cm)   | 3.8            |
| Packaging single depth (cm)          | 68.8           |
| DUN14 (inner)                        | 15410288428519 |
| Units per outer package              | 1              |
| Packaging outer length / height (cm) | 60.0           |
| Packaging outer width (cm)           | 3.8            |
| Packaging outer depth (cm)           | 68.8           |

## Sécurité

|   |        |
|---|--------|
| Glow Wire Test (°C)                       | 650    |
| Condition de fonctionnement optimal (° C) | -10-45 |