


Pixo Zoom 2100lm 17D-60D 3CCT Multipower Black

Artikelnummer 0004521

SYLVANIA


PROTM

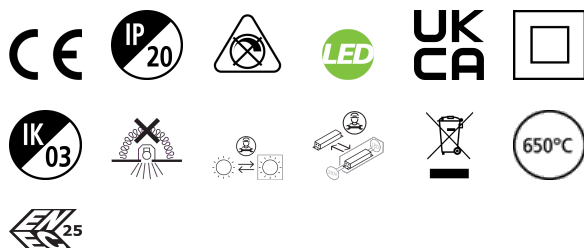

Simple and slick integral design with no driver box and without any visible screws Improved thermal resistance with in-track driver, ideal for retail applications Extremely precise light beams due to the high-quality lenses Adjustable beam angle between 17° - 60° Die-cast aluminium body, Textured black finishing colour Light color temperature: 3CCT - 2700-3000-4000K, changeable from the Adaptor System power: 25W, Fixture lumen output: 2100lm, efficacy: 84lm/W (90lm/W at 15W-60D) LED chromacity: 3 step MacAdam ellipse LED source measured at 2700K & 4000K (SDCM3), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, Multipower in-track driver, ultra low LED flickering rate (5% or less), Multipower Adaptor module meets all installation needs with one single product selection and setting on Adaptor - between 12W (300mA), 18W (450mA), 25W (600mA Max). Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.85mmx170mm 5 years warranty

Technische Werte

Größe (mm)

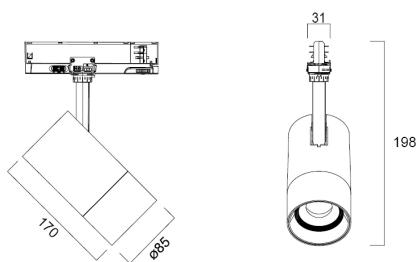

Photometrie


Distance [m]	Cuts diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.14 0.15	0.14 0.15	2570 1403
1.0	0.27 0.30	0.27 0.30	7142 385
1.5	0.41 0.45	0.41 0.45	3174 1573
2.0	0.55 0.60	0.55 0.60	1786 257
2.5	0.68 0.76	0.68 0.76	1142 258
3.0	0.82 0.91	0.82 0.91	784 250

Distance [m] Cuts diameter [m] Beam diameter [m] Illuminance [lx]
— C2 - C180 (Half beam angle: 17.2°)
— C30 - C270 (Half beam angle: 15.6°)

Pixo Zoom 2100lm 17D-60D 3CCT Multipower Black

Artikelnummer 0004521

SYLVANIA



Allgemeine Daten

Produktname	Pixo Zoom 2100lm 17D-60D 3CCT Multipower Black
Technologie	LED
Sockel	N/A
Gehäuse	Aluminium
Montage	Track mounting
Built in presence detector	NONE
Allgemeine Anwendungsbereiche	Museums & Galleries, Retail, Hospitality, Office
Umgebungstemperaturbereich	1°C...+25°C
Virtual assistant compatibility	N/A
ETIM Klasse	EC001744
E-Nummer FI	4279621
Garantie	5 Jahre

Optische Daten

Leuchtenlichtstrom (lm)	2100
Systemeffizienz (lm/W)	84
Lichtfarbe	Warm White or Neutral White or Daylight
Farbwiedergabeindex (Ra)	90
Farbkonsistenz (SDCM)	SDCM3
Distributionstyp	Symmetric
Photobiological Risk Group	RG1

Elektrische Daten

Leistungsaufnahme gesamt (W)	25
Stromstärke (A)	0.11
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Leistungsfaktor der Lampe	0.9
THD (bei 230V, 50Hz, bei 100% Dimm-Level)	15
Elektrische Schutzklasse	Class II
Betriebsgerätetyp	LED driver constant current
Dimmbar	No
Dimming method	N/A
Einschaltstrom (A)	48
Dauer Einschaltstrom (µs)	200
Energy Efficiency Class (A->G) of contained light source	F
Nennfrequenz (Hz)	50/60Hz
Max. Anzahl Leuchten pro 10A C Sicherung	20
Max. Anzahl Leuchten pro 13A C Sicherung	26
Max. Anzahl Leuchten pro 16A C Sicherung	32
Max. Anzahl Leuchten pro 20A C Sicherung	40
Max. Anzahl Leuchten pro 10A B Sicherung	13
Max. Anzahl Leuchten pro 13A B Sicherung	16

Pixo Zoom 2100lm 17D-60D 3CCT Multipower Black

Artikelnummer 0004521

SYLVANIA

Max. Anzahl Leuchten pro 16A B Sicherung	20	Packaging	
Max. Anzahl Leuchten pro 20A B Sicherung	25	EAN Code	5410288045214
Lifetime data		Einzelverpackung Länge (cm)	24.0
Lebensdauer - L70B50	100000	Einzelverpackung Breite (cm)	12.0
Lebensdauer - L70B20	100000	Einzelverpackung Tiefe (cm)	23.3
Lebensdauer - L70B10	100000	DUN 14 (außen)	15410288045211
Lebensdauer - L80B50	100000	Anzahl an Einheiten je Außenverpackung	8
Lebensdauer - L80B20	93000	Außenverpackung Länge (cm)	50.5
Lebensdauer - L80B10	86000	Außenverpackung Breite (cm)	50.0
Lebensdauer - L90B50	56000	Außenverpackung Tiefe (cm)	26.0
Lebensdauer - L90B20	44000	Safety data	
Lebensdauer - L90B10	41000	Glühdrahttest (°C)	650
Physikalische Daten		Optimale Betriebstemperatur (°C)	1-25
Gehäusefarbe	Black		
IP Schutzart	IP20		
IK Schutzart	IK03		
Diffusor	Other		
Diffusormaterial	None		
Reflektoroberfläche	High-gloss		
Länge (mm)	170		
Nominaler Produktdurchmesser (mm)	85		
Gewicht (kg)	0.949		