
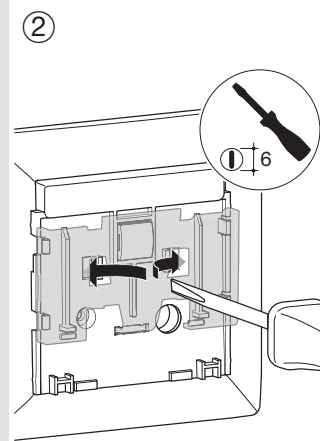
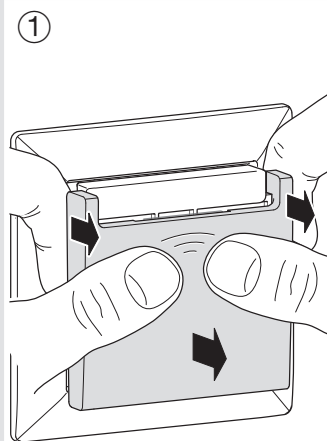


- (FR) Hôtel carte
(DE) Hotel Karte
(IT) Hotel card
(GB) Hotel card


Notice d'instructions
Bedienungsanleitung
Istruccionnes
User instructions

WH101303.

Montage / Montage / Montaggio / Assembly

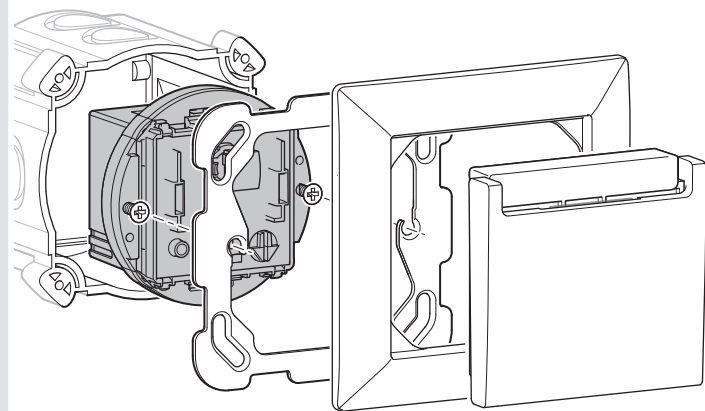

Connexion
Steuerung
Cablaggio
Connection

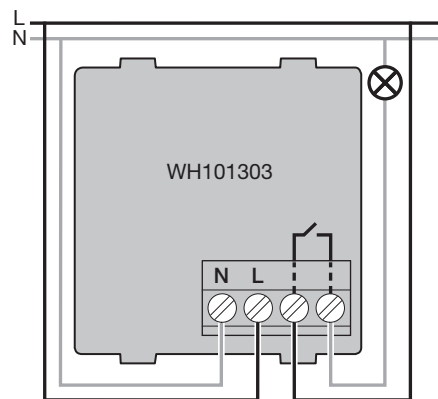


Type de charge
Lasttypen
Tipo di carica
Load type

Charge résistive Ohmsche Last Carica ohmnico Resistive load	 10A AC1
Lampes halogènes Halogenlampen Lampada ad alogene Halogen lamps	 1500 W
Transformateur ferromagnétique Konventioneller Transformator Transformatore ferromagnetico Conventional transformer	 1500 VA
Transformateur électronique Elektronischer Transformator Transformatore elettronico Electronic transformer	 1500 VA
Tubes fluorescents Leuchstofflampen Fluo compatto Fluorescent tubes	 1500 VA
Lampe fluocompacte Kompaktleuchtstofflampe Lampadina fluorescente compatta Compact fluorescent lamp (CFL)	 500 W
Moteur Elektro-Motor Motore elettrico Motor	 Cos φ = 0,6 6A

Caractéristiques techniques
Technische Daten
Caratteristiche tecniche
Technical characteristics

Tension d'alimentation Betriebsspannung Tensione d'alimentazione Supply voltage	230 V +10 % / - 15 % 50 / 60 Hz
Relais de sortie Schaltleistung Relè di uscita Output relay	10A AC1
Capacité des bornes Anschlusskapazität Capacità del terminali Connection capacity	2 x 2,5 mm ²
T° de fonctionnement Betriebstemperatur Temperatura di funzionamento Operating temperature	-5 °C -> +50 °C
T° de stockage Lagertemperatur Temperatura di magazzino Storage temperature	-25 °C -> +70 °C

Fonctionnement
Funktionsprinzip
Funzionare
Working principle

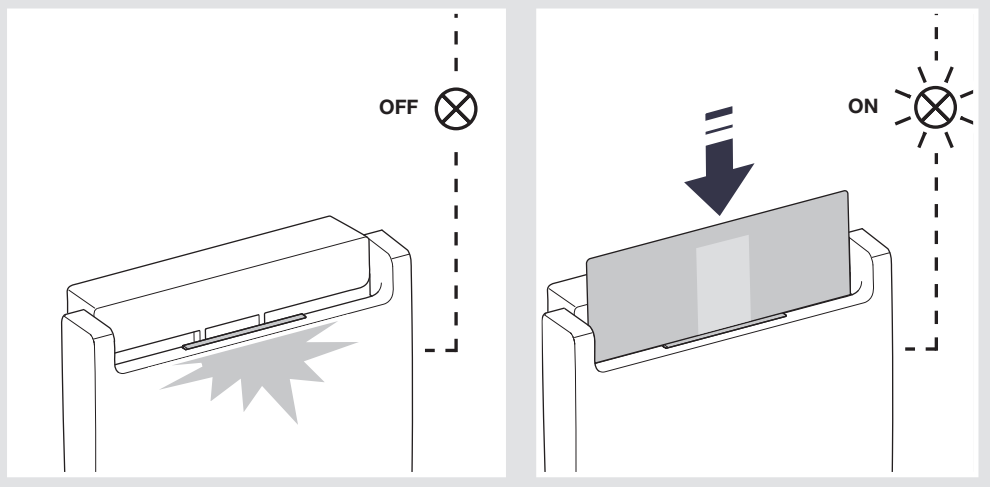

Temporisation
Verzögerungszeit
Temporizzatore
Time delay

