

# ToLEDo SUPERIA T8 CCG L1200 2760LM 830 75K PET SL

Code article 0030245


**SYLVANIA**



A range of high performance ToLEDo Superia T8 LED tubes with reminiscent look of fluorescent tubes High performance glass construction design High lumen output, with an impressive lumen efficacy of 164 lm/W Omnidirectional light distribution and wide beam angle Average rated life of 75,000 hours Lamp length - 1200mm High power factor 200,000 switching cycle 5 years warranty for complete peace of mind Compatible with electromagnetic gear / CCG and also suitable for direct mains operation (220-240V) No bending or discoloration over time Suitable for general illumination in offices, supermarkets, department stores, train stations, petrol stations, parking lots, waterproof luminaires and maintenance free applications

## Atouts techniques

### Dimensions (mm)

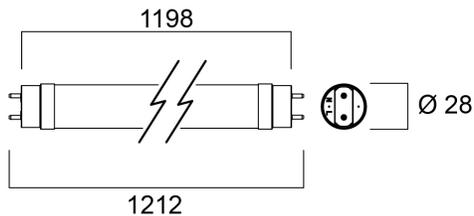

### Photométrie

# ToLED<sub>o</sub> SUPERIA T8 CCG L1200 2760LM 830 75K PET SL

Code article 0030245

**SYLVANIA**

## Données générales

Nom du produit	ToLED <sub>o</sub> SUPERIA T8 CCG L1200 2760LM 830 75K PET SL
Technologie	LED
Lamp shape	Tube, double-ended
Cap/Base	G13
Lamp finish	Frosted/Coated
General application	Hospitality, Logistics & Industry, Residential & Consumer
Operating temperature range (°C)	-20°C...+55°C
Virtual assistant compatibility	N/A
ETIM Class	EC001959
Numéro virtuel FI	4941350
Warranty	5 ans

## Données optiques

Useful luminous flux (Φ <sub>use</sub> )	2760
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	170
Photobiological Risk Group	RG0

## Caractéristiques électriques

Power consumption (W)	16.8
Wattage (W)	16.8
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
Control gear required	No
Dimmable	No
Courant d'appel (A)	10.4
Inrush Duration (µs)	50
Lamp Energy Label (class)	C

## Durée de vie

Lifespan L70 B50	75000
------------------	-------

## Données physiques

IP rating	IP20
Longueur (mm)	1198
Nominal Product Diameter (mm)	28
Poids (kg)	0.19

## Emballage

Product EAN number	5410288302454
Longueur simple de l'emballage (cm)	125.1
Largeur simple de l'emballage (cm)	2.9
Packaging single depth (cm)	2.9
DUN14 (inner)	15410288302451
Units per outer package	10
Packaging outer length / height (cm)	130.0
Packaging outer width (cm)	23.1
Packaging outer depth (cm)	11.0

## Sécurité

Condition de fonctionnement optimal (° C)	-20-55
Consignes de nettoyage en cas de bris	Not applicable
Lampe à objectif spécial	No
Ne convient pas à l'éclairage résidentiel	Yes
Safety message	Suitable for totally enclosed fixture