


SylProof ToLEDo T8 Twin 1500 IP65 4300Lm 865

Code article 0042803

SYLVANIA


YourHome

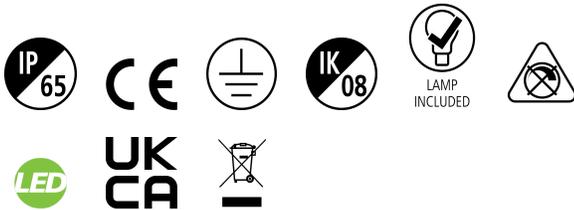

Weatherproof luminaire delivered together with exchangeable ToLEDo T8 LED tubes. Easy to install with stainless steel fixing brackets for ceiling mounting. Polycarbonate housing and diffuser. 6500K; 51W; 4300lm; 84lm/W and 25,000 hours lifetime. IP65; IK08; Class I; 1560mm x 99mm x 78mm

Atouts techniques


Dimensions (mm)

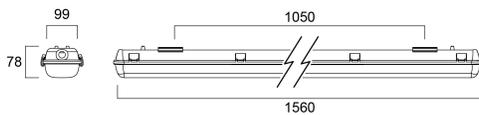

Photométrie

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [ft]	Illuminance [lx]
0.5	1.29 5.14	Ø171 Ø190 Ø200	52.2" 59.7" 65.6"	3303 465 14
1.0	2.56 10.23	Ø171 Ø190 Ø200	52.2" 59.7" 65.6"	803 115 3
1.5	3.87 15.43	Ø171 Ø190 Ø200	52.2" 59.7" 65.6"	437 61 2
2.0	5.16 20.58	Ø171 Ø190 Ø200	52.2" 59.7" 65.6"	268 39 1
2.5	6.45 25.72	Ø171 Ø190 Ø200	52.2" 59.7" 65.6"	167 24 1
3.0	7.74 30.87	Ø171 Ø190 Ø200	52.2" 59.7" 65.6"	103 15 1

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 156.0°)
 — C90 - C270 (Half beam angle: 104.4°)

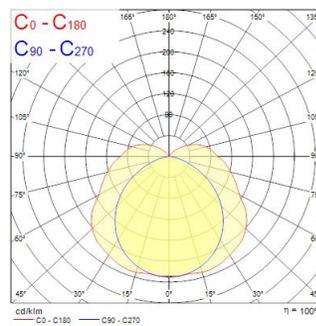

SylProof ToLEDo T8 Twin 1500 IP65 4300Lm 865

Code article 0042803

SYLVANIA

Données générales

Nom du produit	SylProof ToLEDo T8 Twin 1500 IP65 4300Lm 865
Technologie	LED
Cap/Base	G13
Housing	PC Polycarbonate
Montage	Ceiling surface mounting
General application	Logistics & Industry
ETIM Class	EC002892
Warranty	3 ans

Données physiques

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Longueur (mm)	1560
Largeur (mm)	99
Nominal Product Height (mm)	78
Poids (kg)	1.97

Données optiques

Fixture luminous flux (lm)	4300
Luminaire efficacy (lm/W)	84
Température de couleur (K)	6500
Couleur de lumière	Daylight
IRC (Ra)	80
Photobiological Risk Group	Not applicable
Maintien du flux à la fin de la durée de vie nominale (lm)	70

Emballage

Product EAN number	5410288428031
Longueur simple de l'emballage (cm)	156.9
Largeur simple de l'emballage (cm)	11.1
Packaging single depth (cm)	8.0
DUN14 (inner)	15410288428038
Units per outer package	1
Packaging outer length / height (cm)	156.9
Packaging outer width (cm)	11.1
Packaging outer depth (cm)	8.0

Caractéristiques électriques

Lampe incluse	0029299
Consommation électrique totale (W)	51
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1
Electrical protection	Class I
No. Of switching cycles before premature failures	>200000
Dimmable	No
Dimming method	N/A
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz