


# INSET TR SW IP44 OUTDOOR WH EX-LMP

Code article 3084030

**SYLVANIA**


**PRO**<sup>TM</sup>

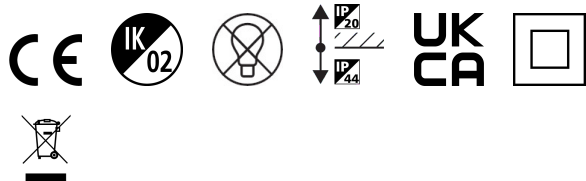

75mm cut out. 2 x 25° Tilt. Round bezel.

## Atouts techniques

### Dimensions (mm)

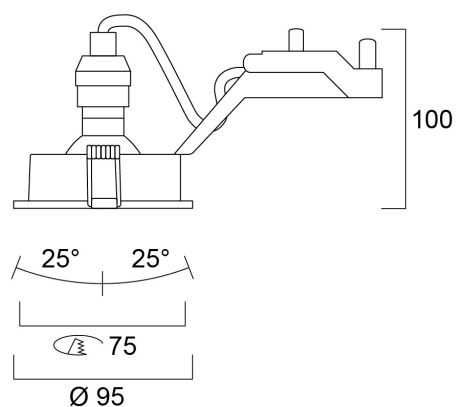

### Photométrie

# INSET TR SW IP44 OUTDOOR WH EX-LMP

Code article 3084030

**SYLVANIA**

## Données générales

|                     |                                     |
|---------------------|-------------------------------------|
| Nom du produit      | INSET TR SW IP44 OUTDOOR WH EX-LMP  |
| Technologie         | Light Source Not Integrated         |
| Cap/Base            | GU10                                |
| Housing             | Aluminium                           |
| Montage             | Ceiling recessed mounting           |
| Environment         | Indoor                              |
| General application | Hospitality, Residential & Consumer |
| ETIM Class          | EC001744                            |
| Numéro virtuel FI   | 4271330                             |
| Numéro virtuel SE   | 7463870                             |
| Warranty            | 3 ans                               |

## Données optiques

|                       |                   |
|-----------------------|-------------------|
| LOR (%)               | Dependent on lamp |
| Chromaticité réglable | N                 |

## Caractéristiques électriques

|                                          |                             |
|------------------------------------------|-----------------------------|
| Lampe incluse                            | Fixture without Lightsource |
| Primary Supply/Product voltage - min (V) | 230                         |
| Primary Supply/Product voltage - max (V) | 240                         |
| Electrical protection                    | Class II                    |
| Nominal Frequency (Hz)                   | 50/60Hz                     |

## Données physiques

|                             |         |
|-----------------------------|---------|
| Housing colour              | White   |
| IP rating                   | IP44/20 |
| IK rating                   | IK02    |
| Longueur (mm)               | 95      |
| Largeur (mm)                | 95      |
| Nominal Product Height (mm) | 100     |
| Poids (kg)                  | 0.175   |
| Recessed Depth (mm)         | 100     |

## Emballage

|                                      |                |
|--------------------------------------|----------------|
| Product EAN number                   | 8711971840305  |
| Longueur simple de l'emballage (cm)  | 13.1           |
| Largeur simple de l'emballage (cm)   | 10.07          |
| Packaging single depth (cm)          | 8.4            |
| DUN14 (inner)                        | 18711971840302 |
| Units per outer package              | 30             |
| Packaging outer length / height (cm) | 28.7           |
| Packaging outer width (cm)           | 53.1           |
| Packaging outer depth (cm)           | 28.5           |