

# SylDeco Round IP54 GU10 Direct

Code article 0047132


**SYLVANIA**



Round shaped exterior surface wall light with GU10 lamp holder (ideal for RefLED Retro LED lamp range), RAL9005 - Black Aluminium housing, light emission on one side, 220-240V, Class I, IP54, IK07, 76 x 102 x 123mm (W x H x D). Weight: 0.4 kg. Lamp is not included.

## Atouts techniques

### Dimensions (mm)

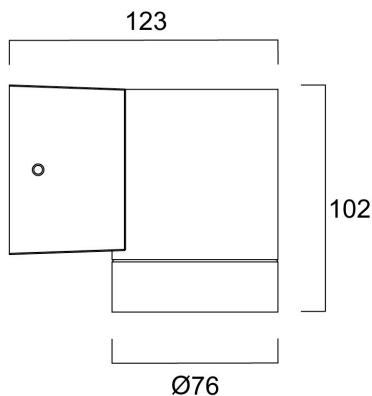

### Photométrie

# SylDeco Round IP54 GU10 Direct

Code article 0047132

**SYLVANIA**

## Données générales

Nom du produit	SylDeco Round IP54 GU10 Direct
Technologie	Light Source Not Integrated
Cap/Base	GU10
Housing	Aluminium
Montage	Wall recessed, Wall surface mounted
Built in presence detector	NONE
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	N/A
Luminaire efficacy (lm/W)	N/A
Couleur de lumière	N/A
Colour Variation Initial (SDCM)	N/A
Distribution type	Symmetric
Photobiological Risk Group	Not applicable

## Caractéristiques électriques

Lampe incluse	Fixture without Lightsource
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	1
Electrical protection	Class I
Type d'appareillage	Not required
Dimmable	No
Dimming method	N/A
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	1
Max. products per 16A B Breaker	1
Connectable conductor cross section - Max (mm <sup>2</sup> )	4

## Durée de vie

Lifespan L70 B50	90000
Lifespan L70 B20	80000
Lifespan L70 B10	78000
Lifespan L80 B50	56000
Lifespan L80 B20	50000
Lifespan L80 B10	49000
Lifespan L90 B50	27000
Lifespan L90 B20	24000
Lifespan L90 B10	24000

# SylDeco Round IP54 GU10 Direct

Code article 0047132

**SYLVANIA**

## Données physiques

Housing colour	RAL 9005 - Jet black
IP rating	IP54
IK rating	IK07
Diffuser finish	Transparent
Diffuser material	Glass
Longueur (mm)	123
Largeur (mm)	76
Nominal Product Height (mm)	100
Poids (kg)	0.406

## Emballage

Product EAN number	5410288471327
Longueur simple de l'emballage (cm)	11.0
Largeur simple de l'emballage (cm)	13.0
Packaging single depth (cm)	8.0
DUN14 (inner)	15410288471324
Units per outer package	16
Packaging outer length / height (cm)	34.0
Packaging outer width (cm)	27.5
Packaging outer depth (cm)	24.0

## Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-40