

# Concord

Raiden IP66 30KLM 865 Street  
2824131



## Features

- Outdoor and indoor floodlight range with in house design, comes complete with 1m flying lead and adjustable bracket, aluminium housing, RAL 9022 - Pearl light grey, clear glass diffuser, IP66, IK08, Class I, 6500K, Non-dimming, 28700lm, 221W, 130lm/W, CRI80, Street beam angle 155\*75°, 100000 hrs L80B50 lifespan, 561x569x76mm (LxWxH) dimensions, 12.5kg weight.


## Product Overview

Product name	Raiden IP66 30KLM 865 Street
Technology	LED
Cap/Base	N/A
Housing	Aluminium
General application	Logistics & Industry
ETIM Class	EC001744
Fixture luminous flux (lm)	28700
Luminaire efficacy (lm/W)	130
Colour temperature (K)	6500
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	Not Applicable
Beam Angle (°)	155*75
Photobiological Risk Group	RG1
Total power consumption (W)	221
Electrical protection	Class I
Dimmable	No
Housing colour	RAL 9022 - Pearl light grey
IP rating	IP66
IK rating	IK08
Product EAN number	5025768241316
Warranty	5 years


# Concord

Raiden IP66 30KLM 865 Street  
**2824131**

## Photometry

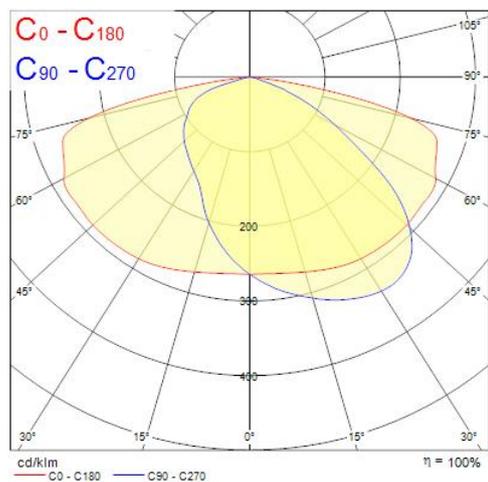

## Technical drawings

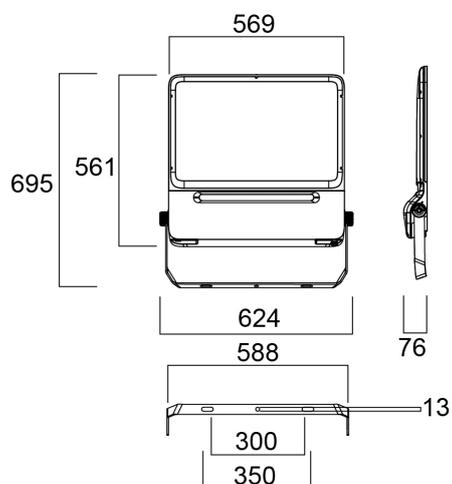

## Data table

### GENERAL DATA

**Product name**

Raiden IP66 30KLM 865 Street

# Concord

Raiden IP66 30KLM 865 Street  
2824131

Technology	LED
Cap/Base	N/A
Housing	Aluminium
General application	Logistics & Industry
Operating temperature range (°C)	-40°C - 50°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 years

## OPTICAL DATA

Fixture luminous flux (lm)	28700
Luminaire efficacy (lm/W)	130
Colour temperature (K)	6500
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	Not Applicable
Beam Angle (°)	155*75
Photobiological Risk Group	RG1

## ELECTRICAL DATA

Total power consumption (W)	221
Mains voltage (V)	220-240V~
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Transformer required	No
Dimmable	No
Drive current (mA)	4550
Inrush Current (A)	120
Inrush Duration (µs)	200
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz

# Concord

Raiden IP66 30KLM 865 Street  
2824131

Max. Luminaires per 10A C Breaker	5
Max. Luminaires per 13A C Breaker	6
Max. Luminaires per 16A C Breaker	9
Max. Luminaires per 20A C Breaker	10
Max. Luminaires per 10A B Breaker	3
Max. Luminaires per 13A B Breaker	4
Max. Luminaires per 16A B Breaker	5
Max. Luminaires per 20A B Breaker	6

## LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	94000

## PHYSICAL DATA

Housing colour	RAL 9022 - Pearl light grey
IP rating	IP66
IK rating	IK08
Nominal Product Length (mm)	561
Nominal Product Width (mm)	569
Nominal Product Height (mm)	76
Nominal Product Diameter (mm)	Not applicable
Weight (kg)	12.5

## PACKAGING

Single packaging type	Carton
Product EAN number	5025768241316
Packaging single length / height (cm)	63.0
Packaging single width (cm)	63.0
Packaging single depth (cm)	14.0
DUN14 (outer)	05025768241316
Units per outer package	1
Packaging outer length / height (cm)	63.0
Packaging outer width (cm)	63.0
Packaging outer depth (cm)	14.0

# Concord

Raiden IP66 30KLM 865 Street  
**2824131**

---

## SAFETY DATA

---

<b>Optimal operating condition (°C)</b>	-40-50
<b>Special purpose lamp</b>	No
<b>Dry applications use only</b>	No
<b>Suitable for household illumination</b>	No