

ToLEDo G4 300LM 865 SL

Code article 0029660


SYLVANIA



LED retrofit replacement for halogen G4 low voltage capsules Compact design Omni-directional light distribution 12V AC/DC 200lm = 25W halogen G4 lamp High lumen efficacy: 125lm/W 90% energy saving Non-dimmable Suitable for chandeliers, interior display, shop windows, decorative and general lighting applications

Atouts techniques

Dimensions (mm)

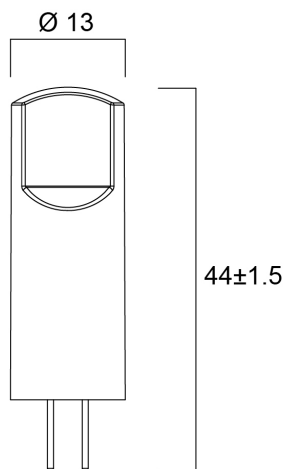

Photométrie

ToLEDo G4 300LM 865 SL

Code article 0029660



Données générales

Nom du produit	ToLEDo G4 300LM 865 SL
Technologie	LED
Puissance (nominale) (W)	2.4
Cap/Base	G4
Fixture rating	Open
General application	Hospitality, Museums & Galleries, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
Warranty	3 ans

Données optiques

Useful luminous flux (Φ_{use})	300
Flux lumineux utile (nominal) (lm)	300
Température de couleur (K)	6500
Couleur de lumière	Daylight
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Maintien du flux à la fin de la durée de vie nominale (lm)	70

Caractéristiques électriques

Power consumption (W)	2.4
Wattage (W)	2.4
Equivalent watt (W)	25
Primary Supply/Product voltage - min (V)	12
Primary Supply/Product voltage - max (V)	12
Control gear required	Yes
No. Of switching cycles before premature failures	>100000
Dimmable	No
Courant d'appel (A)	8
Inrush Duration (μ s)	500
Lamp Energy Label (class)	E
Max. products per 16A C Breaker	42
Max. products per 16A B Breaker	26

Durée de vie

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Durée de vie moyenne (nominale) (h)	15000

Données physiques

Longueur (mm)	44
Nominal Product Diameter (mm)	13
Poids (kg)	0.027

ToLEDo G4 300LM 865 SL

Code article 0029660

SYLVANIA

Emballage

Product EAN number	5410288296609
Longueur simple de l'emballage (cm)	6.1
Largeur simple de l'emballage (cm)	5.1
Packaging single depth (cm)	8.2
DUN14 (inner)	15410288296606
Units per inner package	6
Packaging inner length / height (cm)	16.4
Packaging inner width (cm)	13.2
Packaging inner depth (cm)	9.3
DUN14 (outer)	25410288296603
Units per outer package	48
Packaging outer length / height (cm)	34.6
Packaging outer width (cm)	28.2
Packaging outer depth (cm)	20.8

Sécurité

Condition de fonctionnement optimal (° C)	-20-40
Consignes de nettoyage en cas de bris	Not applicable
Lampe à objectif spécial	No
Utilisation pour applications sèches uniquement	Yes
Ne convient pas à l'éclairage résidentiel	Yes
Safety message	Suitable for approved transf./dimmers