

PIXO LINE 1500 UGR19 840 White

Artikelnummer 0007824

SYLVANIA


PROTM



Pixo Line is a linear track system, adds flexibility to any space due the variety of product options Offers an easy installation with two separate modules Push-in/push-out mechanism with GR6d-15 connector Compatible with Zhaga Book 14 Aluminium body, plastic end caps,aluminised plastic low glare optics in a single line configuration, light beam angle:70° Textured white finishing colour. Light color temperature: 4000K, neutral white, max. system power: 50W Max. fixture lumen output: 7500lm, efficacy: 150lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation Multipower driver module with 8 power settings meet all installation needs with one single product, selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class III. Degree of protection: IP20, suitable for indoor environment only Light modules should be combined with suitable in-track drivers Nominal product dimensions: L.1464mmx37.4mmx37mm

Technische Werte

Größe (mm)

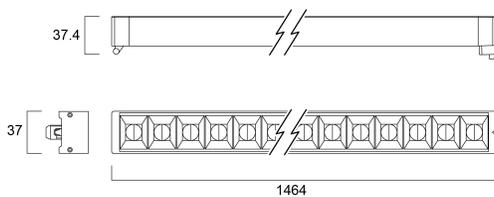

Photometrie

0.5	0.65 0.70	E171 E149 E100	2474 714 698
1.0	1.30 1.40	E171 E149 E100	6044 178 1871
1.5	1.96 2.09	E171 E149 E100	2690 734 743
2.0	2.61 2.79	E171 E149 E100	1511 468 479
2.5	3.26 3.49	E171 E149 E100	907 280 287
3.0	3.91 4.19	E171 E149 E100	671 190 198


Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 65.8°)
— C90 - C270 (Half beam angle: 66.2°)

PIXO LINE 1500 UGR19 840 White

Artikelnummer 0007824

SYLVANIA



PIXO LINE 1500 UGR19 840 White

Artikelnummer 0007824

SYLVANIA

Physikalische Daten

Gehäusefarbe	White
IP Schutzart	IP20
IK Schutzart	IK03
Länge (mm)	1464
Breite (mm)	37
Nominale Produkthöhe (mm)	37.4
Gewicht (kg)	0.9

Packaging

EAN Code	5410288078243
Einzelverpackung Länge (cm)	147.0
Einzelverpackung Breite (cm)	4.3
Einzelverpackung Tiefe (cm)	4.3
DUN 14 (außen)	15410288078240
Anzahl an Einheiten je Außenverpackung	10
Außenverpackung Länge (cm)	149.0
Außenverpackung Breite (cm)	24.0
Außenverpackung Tiefe (cm)	11.0

Safety data

Glühdrahttest (°C)	650
Optimale Betriebstemperatur (°C)	-20-40