

Concord

Raiden IP66 8KLM 865 Symmetric Wide DALI 2824144



Features

- Outdoor and indoor floodlight range with in house design, comes complete with 1m flying lead and adjustable bracket, aluminium housing, RAL 9022 - Pearl light grey, clear glass diffuser, IP66, IK08, Class I, 6500K, DALI dimmable, 9100lm, 67W, 136lm/W, CRI80, Symmetric Wide beam angle 60°, 100000 hrs L80B50 lifespan, 327x270x74mm (LxWxH) dimensions, 4.3kg weight.


Product Overview

| | |
|---------------------------------|--|
| Product name | Raiden IP66 8KLM 865 Symmetric Wide DALI |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| General application | Logistics & Industry |
| ETIM Class | EC001744 |
| Fixture luminous flux (lm) | 9100 |
| Luminaire efficacy (lm/W) | 136 |
| Colour temperature (K) | 6500 |
| Light colour | Cool White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Beam Angle (°) | 60 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 67 |
| Electrical protection | Class I |
| Dimmable | Yes |
| Housing colour | RAL 9022 - Pearl light grey |
| IP rating | IP66 |
| IK rating | IK08 |
| Product EAN number | 5025768241446 |
| Warranty | 5 years |


Concord

Raiden IP66 8KLM 865 Symmetric Wide DALI 2824144

Photometry

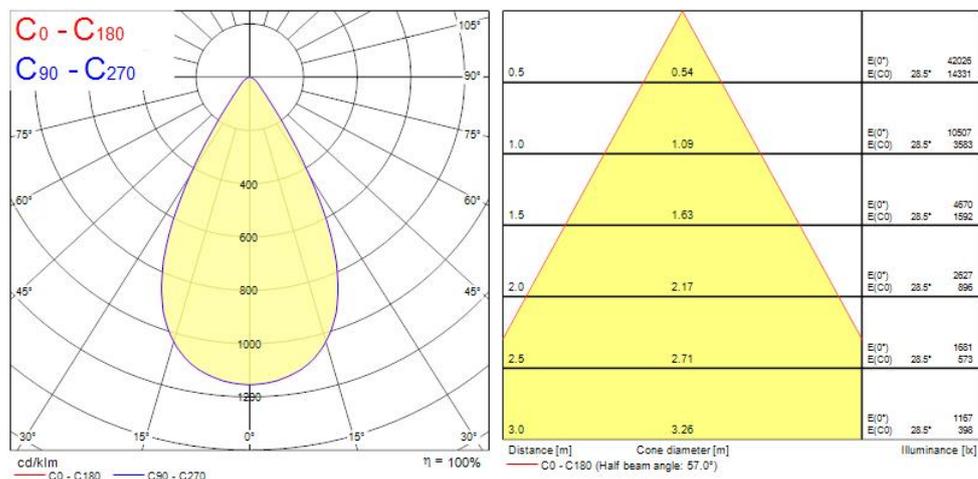

Technical drawings

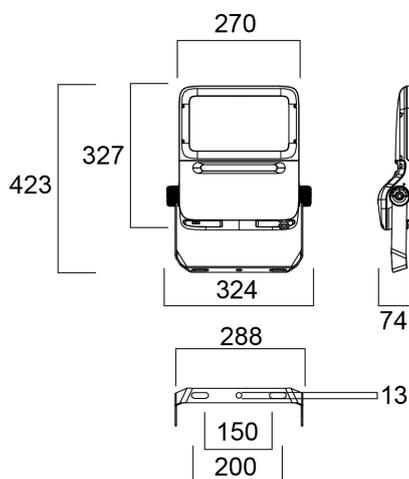

Data table

GENERAL DATA

Product name

Raiden IP66 8KLM 865 Symmetric Wide DALI

Concord

Raiden IP66 8KLM 865 Symmetric Wide DALI 2824144

| | |
|---|----------------------|
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| General application | Logistics & Industry |
| Operating temperature range (°C) | -40°C - 50°C |
| Performance ambient temperature Tq (°C) | 25 |
| ETIM Class | EC001744 |
| Warranty | 5 years |

OPTICAL DATA

| | |
|---------------------------------|------------|
| Fixture luminous flux (lm) | 9100 |
| Luminaire efficacy (lm/W) | 136 |
| Colour temperature (K) | 6500 |
| Light colour | Cool White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Beam Angle (°) | 60 |
| Photobiological Risk Group | RG1 |

ELECTRICAL DATA

| | |
|-----------------------------------|-----------|
| Total power consumption (W) | 67 |
| Mains voltage (V) | 220-240V~ |
| Lamp power factor | 0.95 |
| Electrical protection | Class I |
| Control gear required | No |
| Transformer required | No |
| Dimmable | Yes |
| Drive current (mA) | 1280 |
| Inrush Current (A) | 130 |
| Inrush Duration (µs) | 70 |
| Glow Wire Test (°C) | 850 |
| Nominal Frequency (Hz) | 50/60Hz |
| Max. Luminaires per 10A C Breaker | 16 |

Concord

Raiden IP66 8KLM 865 Symmetric Wide DALI 2824144

| | |
|-----------------------------------|----|
| Max. Luminaires per 13A C Breaker | 18 |
| Max. Luminaires per 16A C Breaker | 26 |
| Max. Luminaires per 20A C Breaker | 30 |
| Max. Luminaires per 10A B Breaker | 9 |
| Max. Luminaires per 13A B Breaker | 11 |
| Max. Luminaires per 16A B Breaker | 15 |
| Max. Luminaires per 20A B Breaker | 18 |

LIFETIME DATA

| | |
|------------------|--------|
| Lifespan L70 B50 | 100000 |
| Lifespan L80 B20 | 100000 |

PHYSICAL DATA

| | |
|-------------------------------|-----------------------------|
| Housing colour | RAL 9022 - Pearl light grey |
| IP rating | IP66 |
| IK rating | IK08 |
| Nominal Product Length (mm) | 327 |
| Nominal Product Width (mm) | 270 |
| Nominal Product Height (mm) | 74 |
| Nominal Product Diameter (mm) | Not applicable |
| Weight (kg) | 4.3 |

PACKAGING

| | |
|---------------------------------------|----------------|
| Single packaging type | Carton |
| Product EAN number | 5025768241446 |
| Packaging single length / height (cm) | 39.5 |
| Packaging single width (cm) | 36.5 |
| Packaging single depth (cm) | 14.5 |
| DUN14 (outer) | 05025768241446 |
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 39.5 |
| Packaging outer width (cm) | 36.5 |
| Packaging outer depth (cm) | 14.5 |

Concord

Raiden IP66 8KLM 865 Symmetric Wide DALI
2824144

SAFETY DATA

| | |
|-------------------------------------|--------|
| Optimal operating condition (°C) | -40-50 |
| Special purpose lamp | No |
| Dry applications use only | No |
| Suitable for household illumination | No |