

FICHE PRODUIT

PANEL 625 SURFACE MOUNT KIT H75

SURFACE MOUNT KIT | Cadres de montage en saillie renforcés pour Panel



Zones d'application

- H75 versions suitable for all LEDVANCE Panels
- H50 versions suitable only for LEDVANCE Biolux Panel and Panel Protect

Avantages du produit

- Montage facile grâce aux coins magnétiques préassemblés
- Traverse pour une meilleure stabilité
- H50 version with slim design fits for panels with an overall height of 38 mm (Panel + driver)

Caractéristiques du produit

- Cadre en aluminium extrudé
- Mount frames available in 75 mm (H75) or 50 mm (H50) height
- Available in white (like RAL9003) or black (like RAL9005) color

Oops! An Error Occurred


The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

DONNÉES TECHNIQUES

DIMENSIONS ET POIDS

Longueur	625,5 mm
Largeur	625,5 mm
Hauteur	75,0 mm
Poids du produit	1700,00 g

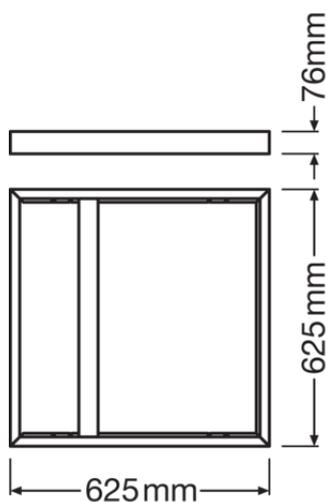

Matériau & couleurs

Couleur du produit	Blanc
--------------------	-------

APPLICATION & MONTAGE

Montage	Saillie
Emplacement montage	Plafond

TÉLÉCHARGEMENTS

Textes pour appels d'offres



Offres

DONNÉES LOGISTIQUES

Oops! An Error Occurred

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

Code produit	Unité d'emballage (Pièces/Unité)	Dimensions (longueur x largeur x hauteur)	Poids approximatif	Volume
4058075472938	Etui carton fermé 1	630 mm x 81 mm x 631 mm	2138.00 g	32.20 dm ³
4058075472945	Carton de regroupement 4	650 mm x 355 mm x 660 mm	10045.00 g	152.30 dm ³

Le code produit mentionné décrit la petite quantité d'unité qui peut être commandée. Une unité peut contenir un ou plusieurs produits. Lorsque vous passez la commande, merci de bien vouloir entrer une unité ou un multiple d'une unité.

AVERTISSEMENT

Sous réserve de modifications. Sauf erreur ou omission. Veuillez à toujours utiliser la version la plus récente.

Oops! An Error Occurred

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.