

DRIVER-SET 30W RJ45 WAGO WINSTA

Numero articolo

EQ10127779

GTIN

4015120127779



Descrizione del prodotto

- ON/OFF plug-and-play LED driver set for ESYLUX satellite LED lights with constant light colour
- Max. power output 30 W
- Output current 700 mA
- Connected to the driver on the primary side: 150 mm white cable to a junction box plus 1 m black cable with WAGO WINSTA 770 3-pin black plug
- Connected to the driver on the secondary side: 1 m blue cable with RJ45 plug

Dati tecnici

GENERALE

Categoria dispositivo	Cablaggio
Conformità	CE, EAC, RoHS, WEEE

ALLEGATO

Tipo di montaggio	Montaggio a incasso
Posizione di montaggio	Soffitto
Tipo di connessione	Spina
Connettore	WAGO WINSTA® MIDI Cod. A, WAGO WINSTA® 770, RJ45
Numero di contatti	3
Lunghezza del cavo	1 m

ALLOGGIAMENTO

Dimensioni	Lunghezza 132 mm x Larghezza 45 mm x Altezza / profondità 30 mm
Peso	345 g

Materiale	PC + ABS
Tipo di protezione	IP20
Temperatura ambiente consentita	0 °C...+40 °C
Umidità relativa	10-90%, senza condensa
Colore	nero / bianco


VERSIONE ELETTRICA

Sistema di controllo	ON/OFF
Classe di protezione	II
Tensione nominale	200 - 240 V AC / 50 - 60 Hz
Tensione di uscita	28 - 42 V DC
Corrente di spunto	12,5 A / 232 µs
Corrente d'uscita	700 mA
Potenza assorbita	30 W
Assorbimento di corrente	300 mA
Consumo in stand-by	< 0,5 W


DRIVER-SET 30W RJ45 WAGO WINSTA

Numero articolo GTIN
EQ10127779 4015120127779

Disegno quotato

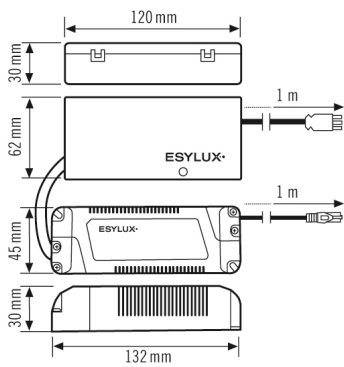

Schema elettrico



Funzionamento standard.

Descrizione dettagliata del prodotto

- ON/OFF plug-and-play LED driver set for ESYLUX satellite LED lights with constant light colour
- Max. power output 30 W
- Output current 700 mA
- Connected to the driver on the primary side: 150 mm white cable to a junction box plus 1 m black cable with WAGO WINSTA 770 3-pin black plug
- Connected to the driver on the secondary side: 1 m blue cable with RJ45 plug