


Features

- 5 metre IP65 LED reel with pre-attached 3M adhesive type; equipped with 600 LEDs; 4400lm per 5m (880lm per 1m); 24V; 3000K; CRI90; SDCM≤3; 50000 hrs (L70);


Product Overview

IPC Code	0068180
Product name	Flex Pro IP65 4400lm 930
Technology	LED
Housing	Other
General application	Hospitality
ETIM Class	EC002706
Fixture luminous flux (lm)	4400
Luminaire efficacy (lm/W)	92
Colour temperature (K)	3000
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Photobiological Risk Group	RG1
Total power consumption (W)	48
Electrical protection	Class III
Dimmable	No
Housing colour	Transparent
IP rating	IP65
IK rating	IK00
Product EAN number	5410288681801

Photometry

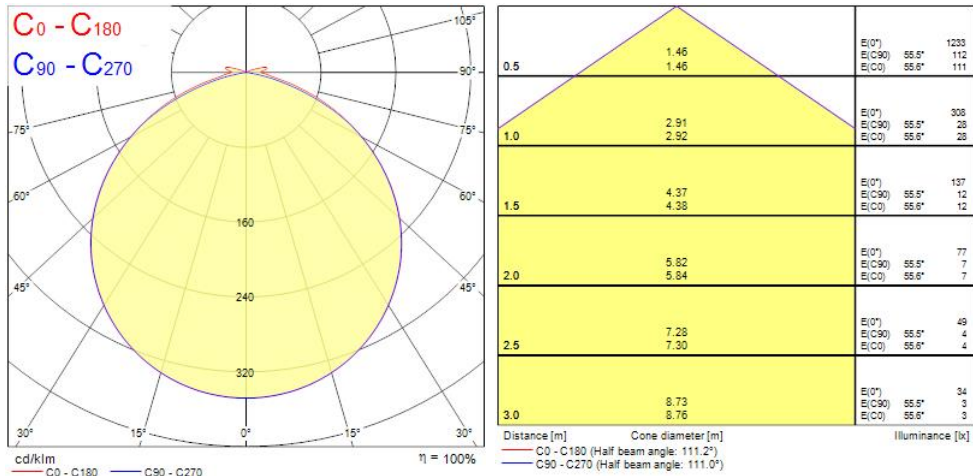

Technical drawings

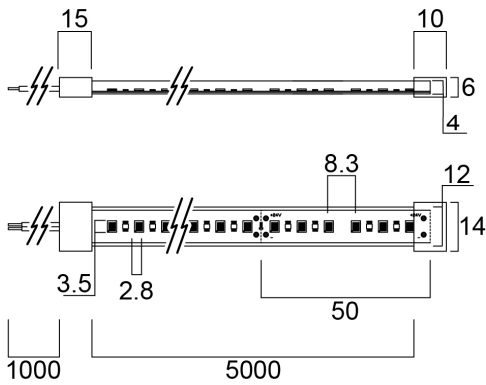

Data table

GENERAL DATA

IPC Code	0068180
Product name	Flex Pro IP65 4400lm 930
Technology	LED

Flex Pro IP65 4400lm 930 0068180

Housing	Other
General application	Hospitality
Operating temperature range (°C)	-20°C - 40°C
ETIM Class	EC002706

OPTICAL DATA

Fixture luminous flux (lm)	4400
Luminaire efficacy (lm/W)	92
Colour temperature (K)	3000
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Distribution type	Symmetric
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	48
Mains voltage (V)	24V
Electrical protection	Class III
Control gear required	Yes
Dimmable	No
Drive current (mA)	2000
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	DC

LIFETIME DATA

Performance ambient temperature Tq (°C)	25
Lifespan - L70 B50	50000

PHYSICAL DATA

Housing colour	Transparent
IP rating	IP65
IK rating	IK00
Nominal Product Length (mm)	5000

Flex Pro IP65 4400lm 930 0068180

Nominal Product Width (mm)	12
Nominal Product Height (mm)	4
Weight (kg)	0.1

PACKAGING

Single packaging type	Carton
Product EAN number	5410288681801
Packaging single length / height (cm)	23.5
Packaging single width (cm)	22.5
Packaging single depth (cm)	3.0
DUN14 (outer)	15410288681808
Units per outer package	20
Packaging outer length / height (cm)	49.0
Packaging outer width (cm)	35.0
Packaging outer depth (cm)	24.0

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No

Energy label

SYLVANIA

0068180



This luminaire contains built-in LED lamps

A++

A+

A

B

C

D

E

}

L

E

D

The lamps cannot be changed in the luminaire.

874/2012

