


PAR56 SP LED White Superia 2000lm

Code article 0060650

SYLVANIA


SpecialITE®

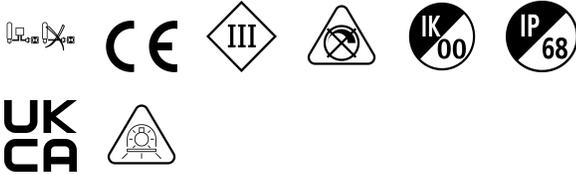

Sylvania's PAR56 LED light sources provide a top class and professional finish to pools and water features, - Unique single-point light source for improved visual appearance, with advanced fresnel lens optics which deliver impressive light and colour uniformity, - Full PPS (Polyphenylsulphide) plastic body, very resistant material for use in plastic and metal fixtures against corrosion by chlorinated and salt water, - Unique sealing method guarantees IP68 watertightness, - Low heat generation, - Remote control is an optional accessory. Lamps also function with ordinary switches, -Only for use with magnetic (not electronic) transformers, - European production delivers outstanding performance and quality

Atouts techniques

Dimensions (mm)

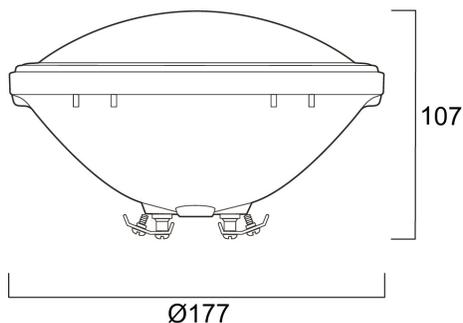

Photométrie

PAR56 SP LED White Superia 2000lm

Code article 0060650

SYLVANIA

Données générales

Nom du produit	PAR56 SP LED White Superia 2000lm
Technologie	LED
Puissance (nominale) (W)	20
Cap/Base	N/A
Fixture rating	Enclosed
General application	Hospitality, Residential & Consumer, SPG
ETIM Class	EC001959
Warranty	3 ans

Données optiques

Useful luminous flux (Φ_{use})	2000
Température de couleur (K)	6500
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Luminous Intensity (cd)	870
Beam Angle (°)	95
Photobiological Risk Group	RG1

Caractéristiques électriques

Power consumption (W)	20
Wattage (W)	20.0
Primary Supply/Product voltage - min (V)	12.0
Primary Supply/Product voltage - max (V)	12.0
Electrical protection	Class III
Control gear required	Yes
Dimmable	No
Dimming method	N/A
Lamp Energy Label (class)	F
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50Hz

Durée de vie

Lifespan L70 B50	25000
Average life (Nominal) (h)	25000
Durée de vie moyenne (nominale) (h)	25000

Données physiques

IP rating	IP68
IK rating	IK00
Nominal Product Height (mm)	106
Nominal Product Diameter (mm)	176
Poids (kg)	0.552

Emballage

Product EAN number	5410288606507
Longueur simple de l'emballage (cm)	15.0
Largeur simple de l'emballage (cm)	15.0
Packaging single depth (cm)	16.3
DUN14 (inner)	15410288606504
Units per outer package	6
Packaging outer length / height (cm)	46.5
Packaging outer width (cm)	31.5
Packaging outer depth (cm)	18.3

Sécurité

Utilisation pour applications sèches uniquement	No
---	----