

# AREUM SUSPENDED 1200 D/I 4000K EM WHITE

Code article 0042961

**SYLVANIA**


**PRO**<sup>TM</sup>



AREUM SUSPENDED 1200 D/I 4000K EM WHITE is a highly efficient suspended LED luminaire with 70% direct and 30% indirect light distribution. Ultra thin (17mm) aluminium body with rounded edges. Length 1200mm, width 300mm. White RAL9016 powder coated luminaire body, powder coated steel surface gearbox and Y-shape power feeded suspension cables. Low flicker (<5%) Constant Current driver. 3hrs integrated emergency with LiFePO4 battery. Luminous flux: 5150lm, Power consumption: 42W. Luminaire efficacy: 123lm/W. CRI (Ra)>80 4000K (Neutral White) LED, chromaticity tolerance: SDCM<3. Lifespan: L80B10 57,000h. UGR<19, Luminance at 65°<3000 cd/m<sup>2</sup>. Photobiological safety risk group 0. Electrical protection: Class I. Glow Wire Test 650°C.

## Atouts techniques


### Dimensions (mm)

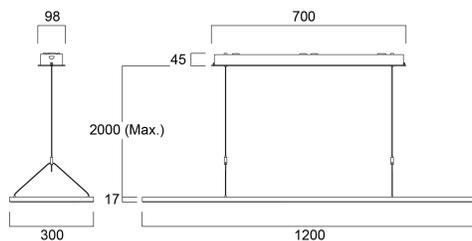

### Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Illuminance [lx]
0.5	0.80 0.85	80°	42.1"	7311
		80°	42.1"	1514
		80°	42.4"	1559
1.0	1.61 1.70	80°	42.1"	1828
		80°	42.1"	379
		80°	42.4"	402
1.5	2.41 2.55	80°	42.1"	812
		80°	42.1"	168
		80°	42.4"	180
2.0	3.21 3.40	80°	42.1"	487
		80°	42.1"	98
		80°	42.4"	107
2.5	4.02 4.26	80°	42.1"	262
		80°	42.1"	51
		80°	42.4"	55
3.0	4.82 5.11	80°	42.1"	173
		80°	42.1"	34
		80°	42.4"	36

Distance [m]    Cone diameter [m]    Illuminance [lx]  
 — C0 - C180 (Half beam angle: 90.9°)  
 — C90 - C270 (Half beam angle: 84.2°)

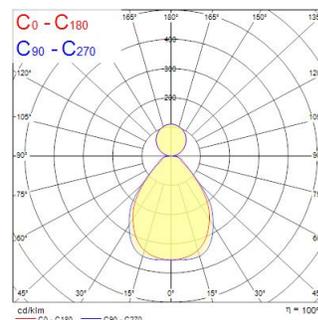

# AREUM SUSPENDED 1200 D/I 4000K EM WHITE

Code article 0042961

**SYLVANIA**

## Données générales

Nom du produit	AREUM SUSPENDED 1200 D/I 4000K EM WHITE
Technologie	LED
Cap/Base	N/A
Housing	Aluminium, Steel
Montage	Suspended
Built in presence detector	NONE
General application	Office
Operating temperature range (°C)	5°C...+35°C
Virtual assistant compatibility	N/A
ETIM Class	EC001743
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	5150
Luminaire efficacy (lm/W)	129
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	84
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0
Emergency duration (h)	3

## Caractéristiques électriques

Consommation électrique totale (W)	43
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15.0
Electrical protection	Class I
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	1050
Courant d'appel (A)	21.7
Inrush Duration (µs)	306
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	25
Max. products per 16A C Breaker	35
Max. products per 16A B Breaker	35
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5

## Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B10	57000

# AREUM SUSPENDED 1200 D/I 4000K EM WHITE

Code article 0042961

**SYLVANIA**

## Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Diffuser finish	Diffuse
Diffuser material	PS Polystyrene
Finition réflecteur	Not Applicable
Longueur (mm)	1200
Largeur (mm)	300
Nominal Product Height (mm)	17
Poids (kg)	4.64

## Emballage

Product EAN number	5410288429618
Longueur simple de l'emballage (cm)	125.0
Largeur simple de l'emballage (cm)	45.5
Packaging single depth (cm)	6.0
DUN14 (inner)	15410288429615
Units per outer package	4
Packaging outer length / height (cm)	126.5
Packaging outer width (cm)	47.0
Packaging outer depth (cm)	26.5

## Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	5-35