

EMERGENCY PACK MANUAL TESTING 50V-200V

Code article 0046602

SYLVANIA


PROTM



The emergency kit enables conversion of general lighting for emergency operation. It is used for driving luminaires with forward voltages (V_f) of 50V to 200V, and built-in adaptability that allows for optimum output current based on the forward voltage of the specific light engine for a more precise match to the controlled LED scheme. Features: Suitable for independent mounting, Auto load detecting, Compatible with leading brands of mains drivers, SmartCharge technology for NiMH batteries, Test-switch function, Battery deep-discharge protection, Compatible with NiMH batteries, 3-hour rated emergency duration, Supply current (max) 25mA. Ambient temperature (t_a): 0°C to +35°C. Max case temperature (t_c) +70°C. Conductor size : 0.2 to 1.5mm². NiMH battery. Product contains a charging regime that prolongs battery life and reduces parasitic power consumption during the product life cycle. By controlling battery temperature this results in energy saving and reduction in maintenance costs throughout the premises.

Atouts techniques

Dimensions (mm)

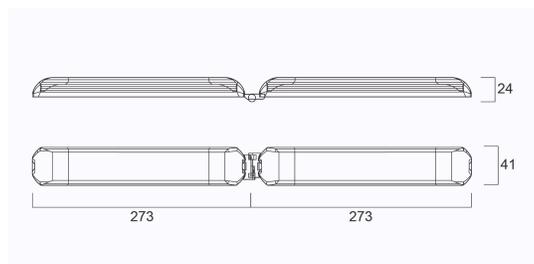

Photométrie

EMERGENCY PACK MANUAL TESTING 50V-200V

Code article 0046602

SYLVANIA

Données générales

Nom du produit	EMERGENCY PACK MANUAL TESTING 50V- 200V
Technologie	Emergency Pack
Environment	Interior
General application	Education, Hospitality, Office, Retail
ETIM Class	EC000471
Warranty	3 ans

Données physiques

Poids (kg) | 0.47

Emballage

Product EAN number	5410288466026
Longueur simple de l'emballage (cm)	28.5
Largeur simple de l'emballage (cm)	10.0
Packaging single depth (cm)	4.5
DUN14 (inner)	05410288466026
Units per inner package	1
Units per outer package	25
Packaging outer length / height (cm)	46.0
Packaging outer width (cm)	31.0
Packaging outer depth (cm)	30.0

Sécurité

Utilisation pour applications sèches uniquement | Yes