

RANA NEO 7500LM S 1200 840 CC EM 2L WHITE

Code article 0054241

SYLVANIA


PROTM



Surface or Suspended LED luminaire with Micro Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 1160x187x56mm, White body colour, IP20, IK07, Constant Current, Emergency 3 hours, Low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 7500lm, 59W, 127lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<18, Luminance at 65° < 3000 cd/m2, Lifespan: 96,000 hours L80B20, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.

Atouts techniques


Dimensions (mm)

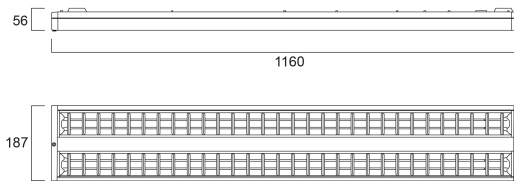

Photométrie

Distance [m]	Cone diameter [m]	E10°	E15°	E30°	E45°	E60°	E75°	E90°	E105°	E120°	Iluminance [lx]
0.5	0.90 0.71	1954	420°	420°	420°	420°	420°	420°	420°	420°	8207
1.0	1.80 1.41	488	420°	420°	420°	420°	420°	420°	420°	420°	154
1.5	2.70 2.12	2173	420°	420°	420°	420°	420°	420°	420°	420°	68
2.0	3.60 2.82	1222	420°	420°	420°	420°	420°	420°	420°	420°	31
2.5	4.50 3.53	782	420°	420°	420°	420°	420°	420°	420°	420°	21
3.0	5.40 4.23	542	420°	420°	420°	420°	420°	420°	420°	420°	16

Distance [m] Cone diameter [m] Iluminance [lx]
 — C0 - C180 (Half beam angle: 70.4°)
 — C90 - C270 (Half beam angle: 64.0°)



RANA NEO 7500LM S 1200 840 CC EM 2L WHITE

Code article 0054241

SYLVANIA

Données générales

Nom du produit	RANA NEO 7500LM S 1200 840 CC EM 2L WHITE
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Ceiling surface mounting, Suspended
General application	Education, Office
Operating temperature range (°C)	0°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	7500
Luminaire efficacy (lm/W)	127
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 18
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80

Caractéristiques électriques

Emergency duration (h)	3
Consommation électrique totale (W)	59
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	300
Courant d'appel (A)	12
Inrush Duration (µs)	25
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	24
Max. products per 13A C Breaker	32
Max. products per 16A C Breaker	39
Max. products per 20A C Breaker	49
Max. products per 10A B Breaker	24
Max. products per 13A B Breaker	32
Max. products per 16A B Breaker	39
Max. products per 20A B Breaker	49

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	96000

RANA NEO 7500LM S 1200 840 CC EM 2L WHITE

Code article 0054241

SYLVANIA

Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Longueur (mm)	1160
Largeur (mm)	187
Nominal Product Height (mm)	47
Poids (kg)	3.2

Emballage

Product EAN number	5410288542416
Longueur simple de l'emballage (cm)	153.5
Largeur simple de l'emballage (cm)	6.5
Packaging single depth (cm)	21.0
DUN14 (inner)	05410288542416
Units per outer package	1
Packaging outer length / height (cm)	153.5
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	21.0

Sécurité

Glow Wire Test (°C)	850
---------------------	-----