

### Features

- Integrated LED recessed spotlight, vertical tilt 30°, black bezel finish with black reflector, white replaceable reflector included in the packaging, 720lm (black reflector), 9W, dimmable trailing/leading edge, 3000K, 40° degree beam angle, polycarbonate and aluminium body, low profile 62mm recessed depth, IP44 from the front, IK03, loop-in/loop-out terminals for fast wiring, weight 0,165Kg, 85mm bezel diameter, 68-72mm cutout, clear lens.


### Product Overview

Product name	START SPOT ALUMINIUM 720LM 827 IP44 BLK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality
ETIM Class	EC001744
Fixture luminous flux (lm)	720
Luminaire efficacy (lm/W)	80
Colour temperature (K)	2700
Light colour	Candlelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	40
Glare control	< 25
Photobiological Risk Group	RG1
Total power consumption (W)	9
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes

## START SPOT ALUMINIUM 720LM 827 IP44 BLK 0005180


Minimum dimming level (%)	10
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9005 - Jet black
IP rating	IP44/20
IK rating	IK03
Product EAN number	5410288051802
Warranty	3 years

### Photometry

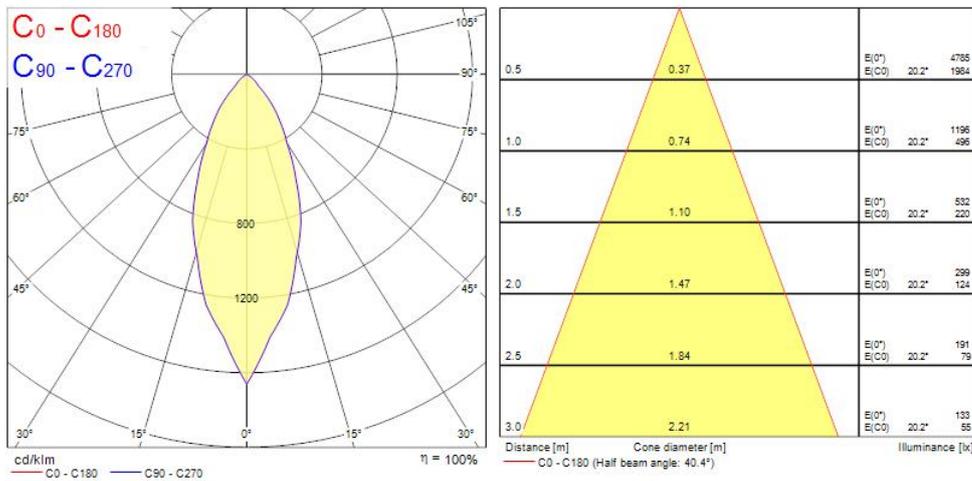

## START SPOT ALUMINIUM 720LM 827 IP44 BLK 0005180

### Technical drawings

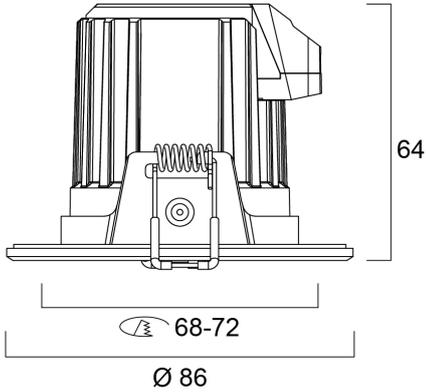

### Data table

#### GENERAL DATA

Product name	START SPOT ALUMINIUM 720LM 827 IP44 BLK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality
Operating temperature range (°C)	-10°C - 35°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	3 years

#### OPTICAL DATA

Fixture luminous flux (lm)	720
Luminaire efficacy (lm/W)	80
Colour temperature (K)	2700

## START SPOT ALUMINIUM 720LM 827 IP44 BLK 0005180

Light colour	Candlelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Rated Luminous Intensity (cd)	1400
Beam Angle (°)	40
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Total power consumption (W)	9
Mains voltage (V)	220-240V~
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	40
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Transformer required	No
Dimmable	Yes
Minimum dimming level (%)	10
Drive current (mA)	165
Drive current - Range (mA)	100mA / 200mA
Inrush Current (A)	10
Inrush Duration ( $\mu$ s)	150
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. Luminaires per 10A C Breaker	50
Max. Luminaires per 13A C Breaker	65
Max. Luminaires per 16A C Breaker	80
Max. Luminaires per 20A C Breaker	100
Max. Luminaires per 16A B Breaker	30

## START SPOT ALUMINIUM 720LM 827 IP44 BLK 0005180

### LIFETIME DATA

Lifespan L70 B50	47000
------------------	-------

### PHYSICAL DATA

Housing colour	RAL 9005 - Jet black
IP rating	IP44/20
IK rating	IK03
Diffuser finish	Other
Diffuser material	None
Reflector finish	Matt
Nominal Product Height (mm)	64
Nominal Product Diameter (mm)	86
Cutout Dimensions (W x L in mm or Diameter in mm)	68-72
Weight (kg)	0.14
Recessed Depth (mm)	100

### PACKAGING

Single packaging type	Carton
Product EAN number	5410288051802
Packaging single length / height (cm)	10.0
Packaging single width (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (inner)	25410288051806
Units per inner package	6
Packaging inner length / height (cm)	28.5
Packaging inner width (cm)	9.0
Packaging inner depth (cm)	19.0
DUN14 (outer)	15410288051809
Units per outer package	36
Packaging outer length / height (cm)	43.6
Packaging outer width (cm)	35.6
Packaging outer depth (cm)	29.3

## SAFETY DATA

---

Optimal operating condition (°C)	-10-35
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No