


OTAO LINEAR 1.2 PRIS 830/840 MP BK

Artikelnummer 0040802

SYLVANIA


PROTM

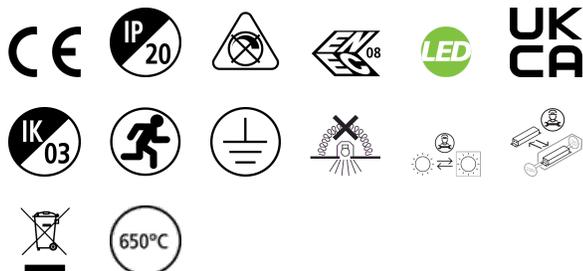

Linear LED Luminaire, RAL9011 (black) finishing, direct distribution, standard surface mounted version complete with end caps and surface brackets, additional mounting options with accessories, 50mm wide extruded aluminium profile, lenses with prismatic diffuser, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, power and CCT switch options at the back of the luminaire, colour temperature: 3000K/4000K CCT options, CRI (Ra) >80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), non-dimmable driver, 4-steps combined dip-switch for direct and D/I light distribution, 2-steps power dip switch in direct mode (22-24W), max system power: 24W, max fixture output: 3350lm @ 4000K CCT, efficacy at max output 140lm/W, additional 2-steps power dip switch when indirect module added (34-36W), max system power in D/I combination: 36W, max fixture output: 4850lm @ 4000K CCT, efficacy at max output 135lm/W, electrical protection: Class I, IP20 ingress protection, IK03 impact resistance level, suitable for indoor environment only, lifespan: 100,000 hours L80B50, operating voltage: 220-240V / 50-60Hz, nominal size: 1147x50x73mm, shipped with through wiring.

Technische Werte

Größe (mm)

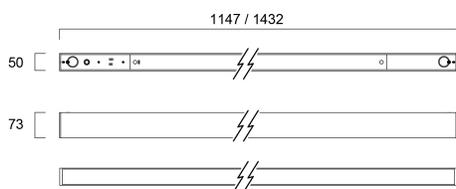

Photometrie


Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.80 0.66	0.70 0.58	1328 2474 3051
1.0	1.60 1.30	1.40 1.16	330 619 763
1.5	2.39 1.96	2.10 1.74	146 273 340
2.0	3.19 2.61	2.80 2.32	66 125 159
2.5	3.99 3.25	3.50 2.90	43 80 102
3.0	4.79 3.91	4.20 3.48	30 56 70

Distance [m] Cone diameter [m] Beam diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 66.2°)
 — C90 - C270 (Half beam angle: 77.2°)

OTAO LINEAR 1.2 PRIS 830/840 MP BK

Artikelnummer 0040802

SYLVANIA

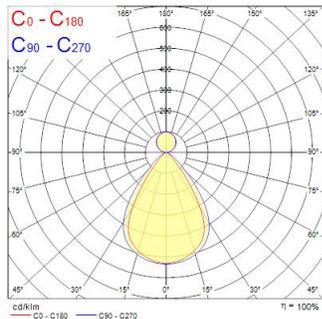

Allgemeine Daten

Produktname	OTAO LINEAR 1.2 PRIS 830/840 MP BK
Technologie	LED
Sockel	N/A
Gehäuse	Aluminium
Montage	Ceiling recessed mounting, Ceiling surface mounting, Suspended, Wall surface mounted
Built in presence detector	NONE
Allgemeine Anwendungsbereiche	Office, Education
Umgebungstemperaturbereich	5°C...+50°C
Virtual assistant compatibility	N/A
ETIM Klasse	EC002892
E-Nummer FI	4170655
Garantie	5 Jahre

Optische Daten

Leuchtenlichtstrom (lm)	3350
Systemeffizienz (lm/W)	140
Lichtfarbe	Warm White or Neutral White
Farbwiedergabeindex (Ra)	80
Farbkonsistenz (SDCM)	SDCM3
Ausstrahlungswinkel (°)	75
Distributionstyp	Symmetric
Blendungsbegrenzung	< 19
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	310
Dauer Notbeleuchtung (h)	3

Elektrische Daten

Leistungsaufnahme gesamt (W)	24
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Leistungsfaktor der Lampe	0.9
THD (bei 230V, 50Hz, bei 100% Dimm-Level)	15.0
Elektrische Schutzklasse	Class I
Betriebsgerätetyp	LED driver constant current
Dimmbar	No
Dimming method	N/A
Stromstärke (mA)	600
Einschaltstrom (A)	7.2
Dauer Einschaltstrom (µs)	190
Energy Efficiency Class (A->G) of contained light source	D
Nennfrequenz (Hz)	50/60Hz
Max. Anzahl Leuchten pro 10A C Sicherung	39
Max. Anzahl Leuchten pro 16A C Sicherung	62
Max. Anzahl Leuchten pro 10A B Sicherung	39
Max. Anzahl Leuchten pro 16A B Sicherung	62
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	1.5

OTAO LINEAR 1.2 PRIS 830/840 MP BK

Artikelnummer 0040802

SYLVANIA

Lifetime data

Lebensdauer - L70B50	100000
Lebensdauer - L80B50	100000

Physikalische Daten

Gehäusefarbe	RAL 9011 - Graphite black
IP Schutzart	IP20
IK Schutzart	IK03
Diffusor	Transparent
Diffusormaterial	PC Polycarbonate
Länge (mm)	1147
Breite (mm)	50
Nominale Produkthöhe (mm)	73
Gewicht (kg)	1.75

Packaging

EAN Code	5410288408026
Einzelverpackung Länge (cm)	122.0
Einzelverpackung Breite (cm)	6.1
Einzelverpackung Tiefe (cm)	7.8
DUN 14 (außen)	15410288408023
Anzahl an Einheiten je Außenverpackung	4
Außenverpackung Länge (cm)	124.0
Außenverpackung Breite (cm)	14.2
Außenverpackung Tiefe (cm)	19.4
Safety data	
Glühdrahttest (°C)	650
Optimale Betriebstemperatur (°C)	5-50