


RANA NEO 6800LM S 1200 830 DALI 2L WHITE

Code article 0054236

SYLVANIA


PROTM

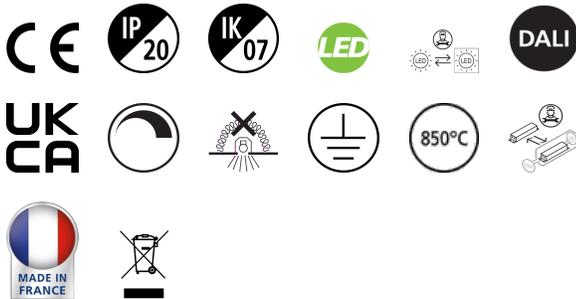

Surface or Suspended LED luminaire with Micro Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 1160x187x56mm, White body colour, IP20, IK07, DALI Dimmable, Low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 6800lm, 58W, 117lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<18, Luminance at 65° < 3000 cd/m2, Lifespan: 96,000 hours L80B20, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.

Atouts techniques

Dimensions (mm)

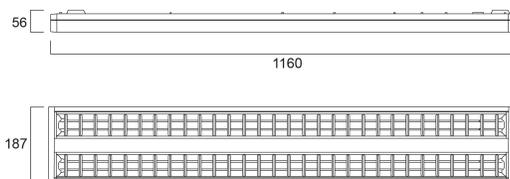


Photométrie

Distance [m]	Cone diameter [m]	E10'	E15'	E30'	E60'	E120'
0.5	0.90 0.66	10470	3910	2310	1150	570
1.0	1.79 1.37	4810	1680	1030	510	260
1.5	2.68 2.05	2080	720	430	210	100
2.0	3.59 2.74	1150	380	230	110	50
2.5	4.49 3.42	730	250	150	70	30
3.0	5.38 4.11	510	160	100	50	20

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 60.9°)
— C90 - C270 (Half beam angle: 63.9°)

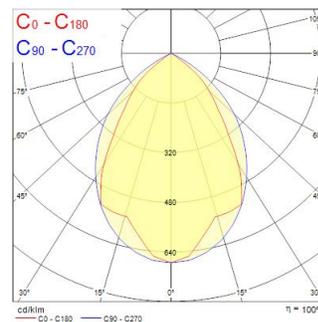

RANA NEO 6800LM S 1200 830 DALI 2L WHITE

Code article 0054236

SYLVANIA

Données générales

Nom du produit	RANA NEO 6800LM S 1200 830 DALI 2L WHITE
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Ceiling surface mounting, Suspended
General application	Education, Office
Operating temperature range (°C)	0°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	6800
Luminaire efficacy (lm/W)	117
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 18
Photobiological Risk Group	RG0

Caractéristiques électriques

Consommation électrique totale (W)	58
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Drive current (mA)	300
Courant d'appel (A)	23.1
Inrush Duration (µs)	174
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	18
Max. products per 13A C Breaker	26
Max. products per 16A C Breaker	28
Max. products per 20A C Breaker	34
Max. products per 10A B Breaker	9
Max. products per 13A B Breaker	13
Max. products per 16A B Breaker	14
Max. products per 20A B Breaker	17

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	96000

RANA NEO 6800LM S 1200 830 DALI 2L WHITE

Code article 0054236

SYLVANIA

Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Longueur (mm)	1160
Largeur (mm)	187
Nominal Product Height (mm)	47
Poids (kg)	3.2

Emballage

Product EAN number	5410288542362
Longueur simple de l'emballage (cm)	153.5
Largeur simple de l'emballage (cm)	6.5
Packaging single depth (cm)	21.0
DUN14 (inner)	05410288542362
Units per outer package	1
Packaging outer length / height (cm)	153.5
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	21.0

Sécurité

Glow Wire Test (°C)	850
---------------------	-----